

THE TEXAS MODEL FOR INTERSECTION TRAFFIC — USER'S GUIDE

Clyde E. Lee, Glenn E. Grayson,
Charlie R. Copeland, Jeff W. Miller,
Thomas W. Rioux, and Vivek S. Savur

RESEARCH REPORT 184-3

PROJECT 3-18-72-184

CENTER FOR TRANSPORTATION RESEARCH

BUREAU OF ENGINEERING RESEARCH

THE UNIVERSITY OF TEXAS AT AUSTIN

JULY 1977

PARTIAL LIST OF REPORTS PUBLISHED BY THE CENTER FOR TRANSPORTATION RESEARCH

This list includes some of the reports published by the Center for Transportation Research and the organizations which were merged to form it: the Center for Highway Research and the Council for Advanced Transportation Studies. Questions about the Center and the availability and costs of specific reports should be addressed to: Director; Center for Transportation Research; ECJ 2.5; The University of Texas at Austin; Austin, Texas 78712.

- 7-1 "Strength and Stiffness of Reinforced Concrete Rectangular Columns Under Biaxially Eccentric Thrust," by J. A. Desai and R. W. Furlong, January 1976.
- 7-2F "Strength and Stiffness of Reinforced Concrete Columns Under Biaxial Bending," by V. Mavichak and R. W. Furlong, November 1976.
- 16-1F "Oil, Grease, and Other Pollutants in Highway Runoff," by Bruce Wiland and Joseph F. Malina, Jr., September 1976.
- 23-1 "Prediction of Temperature and Stresses in Highway Bridges by a Numerical Procedure Using Daily Weather Reports," by Thaksin Thepchatri, C. Philip Johnson, and Hudson Matlock, February 1977.
- 23-2 "Analytical and Experimental Investigation of the Thermal Response of Highway Bridges," by Kenneth M. Will, C. Philip Johnson, and Hudson Matlock, February 1977.
- 23-3F "Temperature Induced Stresses in Highway Bridges by Finite Element Analysis and Field Tests," by Atalay Yargicoglu and C. Philip Johnson, July 1978.
- 29-2F "Strength and Behavior of Anchor Bolts Embedded Near Edges of Concrete Piers," by G. B. Hasselwander, J. O. Jirsa, J. E. Breen, and K. Lo, May 1977.
- 114-4 "Durability, Strength, and Method of Application of Polymer-Impregnated Concrete for Slabs," by Piti Yimprasert, David W. Fowler, and Donald R. Paul, January 1976.
- 114-5 "Partial Polymer Impregnation of Center Point Road Bridge," by Ronald Webster, David W. Fowler, and Donald R. Paul, January 1976.
- 114-6 "Behavior of Post-Tensioned Polymer-Impregnated Concrete Beams," by Ekasit Limsuwan, David W. Fowler, Ned H. Burns, and Donald R. Paul, June 1978.
- 114-7 "An Investigation of the Use of Polymer-Concrete Overlays for Bridge Decks," by Huey-Tsann Hsu, David W. Fowler, Mickey Miller, and Donald R. Paul, March 1979.
- 114-8 "Polymer Concrete Repair of Bridge Decks," by David W. Fowler and Donald R. Paul, March 1979.
- 114-9F "Concrete-Polymer Materials for Highway Applications," by David W. Fowler and Donald R. Paul, March 1979.
- 118-9F "Observation of an Expansive Clay Under Controlled Conditions," by John B. Stevens, Paul N. Brotcke, Dewaine Bogard, and Hudson Matlock, November 1976.
- 123-30F "Overview of Pavement Management Systems Developments in the State Department of Highways and Public Transportation," by W. Ronald Hudson, B. Frank McCullough, Jim Brown, Gerald Peck, and Robert L. Lytton, January 1976 (published jointly with the Texas State Department of Highways and Public Transportation and the Texas Transportation Institute, Texas A&M University).
- 172-1 "Axial Tension Fatigue Strength of Anchor Bolts," by Franklin L. Fischer and Karl H. Frank, March 1977.
- 172-2F "Fatigue of Anchor Bolts," by Karl H. Frank, July 1978.
- 176-4 "Behavior of Axially Loaded Drilled Shafts in Clay-Shales," by Ravi P. Aurora and Lymon C. Reese, March 1976.
- 176-5F "Design Procedures for Axially Loaded Drilled Shafts," by Gerardo W. Quiros and Lymon C. Reese, December 1977.
- 177-1 "Drying Shrinkage and Temperature Drop Stresses in Jointed Reinforced Concrete Pavement," by Felipe Rivero-Vallejo and B. Frank McCullough, May 1976.
- 177-3 "A Study of the Performance of the Mays Ride Meter," by Yi Chin Hu, Hugh J. Williamson, and B. Frank McCullough, January 1977.
- 177-4 "Laboratory Study of the Effect of Nonuniform Foundation Support on Continuously Reinforced Concrete Pavements," by Enrique Jimenez, B. Frank McCullough, and W. Ronald Hudson, August 1977.
- 177-6 "Sixteenth Year Progress Report on Experimental Continuously Reinforced Concrete Pavement in Walker County," by B. Frank McCullough and Thomas P. Chesney, April 1976.
- 177-7 "Continuously Reinforced Concrete Pavement: Structural Performance and Design/Construction Variables," by Pieter J. Strauss, B. Frank McCullough, and W. Ronald Hudson, May 1977.
- 177-9 "CRCP-2, An Improved Computer Program for the Analysis of Continuously Reinforced Concrete Pavements," by James Ma and B. Frank McCullough, August 1977.
- 177-10 "Development of Photographic Techniques for Performing Condition Surveys," by Pieter Strauss, James Long, and B. Frank McCullough, May 1977.
- 177-11 "A Sensitivity Analysis of Rigid Pavement Overlay Design Procedure," by B. C. Nayak, W. Ronald Hudson, and B. Frank McCullough, June 1977.
- 177-12 "A Study of CRCP Performance: New Construction Vs. Overlay," by James I. Daniel, W. Ronald Hudson, and B. Frank McCullough, April 1978.
- 177-13 "A Rigid Pavement Overlay Design Procedure for Texas SDHPT," by Otto Schnitter, W. R. Hudson, and B. F. McCullough, May 1978.
- 177-15 "Precast Repair of Continuously Reinforced Concrete Pavement," by Gary Eugene Elkins, B. Frank McCullough, and W. Ronald Hudson, May 1979.
- 177-16 "Nomographs for the Design of CRCP Steel Reinforcement," by C. S. Noble, B. F. McCullough, and J. C. M. Ma, August 1979.
- 177-17 "Limiting Criteria for the Design of CRCP," by B. Frank McCullough, J. C. M. Ma, and C. S. Noble, August 1979.
- 177-18 "Detection of Voids Underneath Continuously Reinforced Concrete Pavements," by John W. Birkhoff and B. Frank McCullough, August 1979.
- 183-7 "Permanent Deformation Characteristics of Asphalt Mixtures by Repeated-Load Indirect Tensile Test," by Joaquin Vallejo, Thomas W. Kennedy, and Ralph Haas, June 1976.

(Continued inside back cover)

1. Report No. FWHATX78-184-3	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle THE TEXAS MODEL FOR INTERSECTION TRAFFIC - USER'S GUIDE		5. Report Date July 1977	
		6. Performing Organization Code	
7. Author(s) Clyde E. Lee, Glenn E. Grayson, Charlie R. Copeland, Jeff W. Miller, Thomas W. Rioux, and Vivek S. Savur		8. Performing Organization Report No. Research Report 184-3	
9. Performing Organization Name and Address Center for Highway Research The University of Texas at Austin Austin, Texas 78712		10. Work Unit No.	
		11. Contract or Grant No. Research Study 3-18-72-184	
		13. Type of Report and Period Covered Interim	
12. Sponsoring Agency Name and Address Texas State Department of Highways and Public Transportation; Transportation Planning Division P. O. Box 5051 Austin, Texas 78763		14. Sponsoring Agency Code	
15. Supplementary Notes Work done in cooperation with the U. S. Department of Transportation, Federal Highway Administration. Research Study Title: "Simulation of Traffic by a Step-Through Technique (Applications)"			
16. Abstract The Center for Highway Research at The University of Texas at Austin in cooperation with the State Department of Highways and Public Transportation and the Federal Highway Administration has developed a new microscopic traffic simulation package called the TEXAS Model for Intersection Traffic. The TEXAS Model is a computer program that can be used to aid in evaluating the operational effects of various traffic demands, types of traffic control, and/or geometric configurations at single intersections. This report provides detailed guidance for the user of the TEXAS Model by outlining the input requirements and explaining the output format of the package. Input to the TEXAS Model has been designed to be user-oriented and minimal. The input for two pre-simulation processors which are called GEOPRO, the geometry processor, and DVPRO, the driver-vehicle processor, includes (1) geometric features of the intersection; (2) descriptive traffic data such as volumes, speeds, percent turns, etc.; (3) types of vehicles; and (4) types of drivers. Input to the simu- lation processor, called SIMPRO, contains (1) control parameters for the simulation process and (2) specifications for the traffic control scheme at the intersection. The appendix deals with an auxiliary headway distribution analysis processor, called DISFIT, which aids the user in selecting an appropriate headway distribution to be used by DVPRO.			
17. Key Words microscopic traffic simulation package, computer program, operational effects, user's guide, input requirements, output format		18. Distribution Statement No restrictions. This document is available to the public through the National Technical Information Service, Springfield, Virginia 22161.	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 89	22. Price

This page intentionally left blank to facilitate printing on 2 sides.

THE TEXAS MODEL FOR INTERSECTION
TRAFFIC - USER'S GUIDE

by

Clyde E. Lee, Glenn E. Grayson, Charlie R. Copeland,
Jeff W. Miller, Thomas W. Rioux, and Vivek S. Savur

Research Report Number 184-3

Simulation of Traffic by a
Step-Through Technique (Applications)
Research Project 3-18-72-184

conducted for

Texas
State Department of Highways and Public Transportation

in cooperation with the
U. S. Department of Transportation
Federal Highway Administration

by the

CENTER FOR HIGHWAY RESEARCH
THE UNIVERSITY OF TEXAS AT AUSTIN

July 1977

The contents of this report reflect the views of the authors, who are responsible for the facts and the accuracy of the data presented herein. The contents do not necessarily reflect the official views or policies of the Federal Highway Administration. This report does not constitute a standard, specification, or regulation.

PREFACE

This is the third, in a series of four reports on Research Study 3-18-72-184, "Simulation of Traffic by a Step-Through Technique." The report describes the input requirements for a microscopic traffic simulation package called the TEXAS Model for Intersection Traffic and guides the user in applying the model for studying traffic movements at a single intersection.

The four reports which deal with the development, use, and application of the TEXAS Model are

Research Report No. 184-1, "The TEXAS Model for Intersection Traffic - Development," Clyde E. Lee, Thomas W. Rioux, and Charlie R. Copeland.

Research Report No. 184-2, "The TEXAS Model for Intersection Traffic - Programmer's Guide," Clyde E. Lee, Thomas W. Rioux, Vivek S. Savur, and Charlie R. Copeland.

Research Report No. 184-3, "The TEXAS Model for Intersection Traffic - User's Guide," Clyde E. Lee, Glenn E. Grayson, Charlie R. Copeland, Jeff W. Miller, Thomas W. Rioux, and Vivek S. Savur.

Research Report No. 184-4, "The TEXAS Model for Intersection Traffic - Analysis of Signal Warrants and Intersection Capacity," Clyde E. Lee, Vivek S. Savur, and Glenn E. Grayson.

Requests for copies of these reports should be directed to Mr. Phillip L. Wilson, Engineer-Director, Planning and Research Division, File D-10, Texas Highway Department, P. O. Box 5051, Austin, Texas 78763.

This page intentionally left blank to facilitate printing on 2 sides.

ABSTRACT

The Center for Highway Research at The University of Texas at Austin in cooperation with the State Department of Highways and Public Transportation and the Federal Highway Administration has developed a new microscopic traffic simulation package called the TEXAS Model for Intersection Traffic. The TEXAS Model is a computer program that can be used to aid in evaluating the operational effects of various traffic demands, types of traffic control, and/or geometric configurations at single intersections.

This report provides detailed guidance for the user of the TEXAS Model by outlining the input requirements and explaining the output format of the package. Input to the TEXAS Model has been designed to be user-oriented and minimal. The input for two pre-simulation processors which are called GEOPRO, the geometry processor, and DVPRO, the driver-vehicle processor, includes (1) geometric features of the intersection; (2) descriptive traffic data such as volumes, speeds, percent turns, etc.; (3) types of vehicles; and (4) types of drivers. Input to the simulation processor, called SIMPRO, contains (1) control parameters for the simulation process and (2) specifications for the traffic control scheme at the intersection.

Two examples of input include (a) data for the two pre-simulation processors, and (b) information needed to run the simulation processor. An example of the simulation processor output is shown to illustrate the concise and functional array of traffic performance indicators that result from the simulation, and key performance factors are discussed briefly to aid the user in interpreting results.

The appendix deals with an auxiliary headway distribution analysis processor, called DISFIT, which aids the user in selecting an appropriate headway distribution to be used by DVPRO.

The TEXAS Model for Intersection Traffic may be applied in evaluating existing or proposed intersection designs and for assessing the effects of changes in roadway geometry, driver and vehicle characteristics, flow conditions, intersection control, lane control, and signal timing plans upon traffic operations.

This page intentionally left blank to facilitate printing on 2 sides.

SUMMARY

This report provides the user with a complete input guide to the computer simulation package called the TEXAS Model for Intersection Traffic. The step-by-step input guide leads the user through the process of encoding all required information and using the available options. Selective caution statements help steer the user away from common input errors. The report includes samples of typical input coding sheets and samples of the computer output which results from the example input.

This page intentionally left blank to facilitate printing on 2 sides.

IMPLEMENTATION STATEMENT

Implementation of the TEXAS Model for Intersection Traffic is recommended to proceed in two stages in the State Department of Highways and Public Transportation. First, personnel in D-18T and D-19 should cooperate with engineers in the Districts in selecting intersections for study and in running the model to produce information needed for analysis of specific problems. Copies of this report should be made available to each user of the model so that familiarization with input and output can be developed as experience is gained. In the second stage, a decision should be made about adapting the model for access from remote terminals. This phase of implementation should not be attempted until utility of the model has been confirmed in the first stage. Assistance in implementing the TEXAS Model into the SDHPT will be provided by the Center for Highway Research.

This page intentionally left blank to facilitate printing on 2 sides.

TABLE OF CONTENTS

PREFACE	iii
ABSTRACT	iv
SUMMARY	v
IMPLEMENTATION STATEMENT	vi
CHAPTER 1. DESCRIPTION OF THE TEXAS MODEL	1
CHAPTER 2. PRE-SIMULATION PROCESSORS INPUT FORM	3
CHAPTER 3. PRE-SIMULATION PROCESSORS GUIDE	23
CHAPTER 4. SIMULATOR INPUT FORM AND GUIDE	34
CHAPTER 5. CASE STUDY: 35TH AND JEFFERSON STREET INTERSECTION .	59
CHAPTER 6. EXPLANATION OF SIMULATION RUN STATISTICS	75
APPENDIX. HEADWAY DISTRIBUTIONS	
HEADWAY DISTRIBUTION ANALYSIS PROCESSOR INPUT FORM	78
HEADWAY DISTRIBUTIONS DISCUSSION	79

This page intentionally left blank to facilitate printing on 2 sides.

CHAPTER 1. DESCRIPTION OF THE TEXAS MODEL

The TEXAS (Traffic Experimental and Analytical Simulation) Model, written in ANSI-standard FORTRAN IV computer language, is a microscopic simulator of traffic flow through an isolated street or highway intersection. It was developed under Research Study No. 3-18-72-184 as part of the Cooperative Highway Research Program of the Center for Highway Research in cooperation with the State Department of Highways and Public Transportation and the Federal Highway Administration. Development of the model was undertaken using the CDC 6600/6400 computer system at The University of Texas at Austin. Subsequent adaptation was made to the State Department of Highways and Public Transportation's IBM 370 computer in the Division of Automation, D-19.

Three computer programs comprise the TEXAS model.

- (1) The pre-simulation Geometry Processor takes geometric information about the intersection, computes path geometry for all intersection paths, and optionally produces a plot of the intersection.
- (2) The pre-simulation Driver Vehicle Processor takes traffic volume and other information about the traffic stream and produces a list of driver-vehicle pairs to be used in the simulation processor. Several driver types and vehicle classifications are used.
- (3) The Simulation Processor examines sequentially each driver-vehicle unit in the system and, in response to surrounding traffic and to traffic control devices, forecasts its position, velocity, and acceleration into the next increment of simulation time. Each unit is thereby "stepped through" the system in small time increments. Delay, speed, and volume statistics are accumulated throughout the simulation process and reported at the end of a selected time increment.

A schematic representation of the TEXAS model is as shown in Fig 1. The remainder of this document contains input data forms, explanatory statements, and examples to guide the program user.

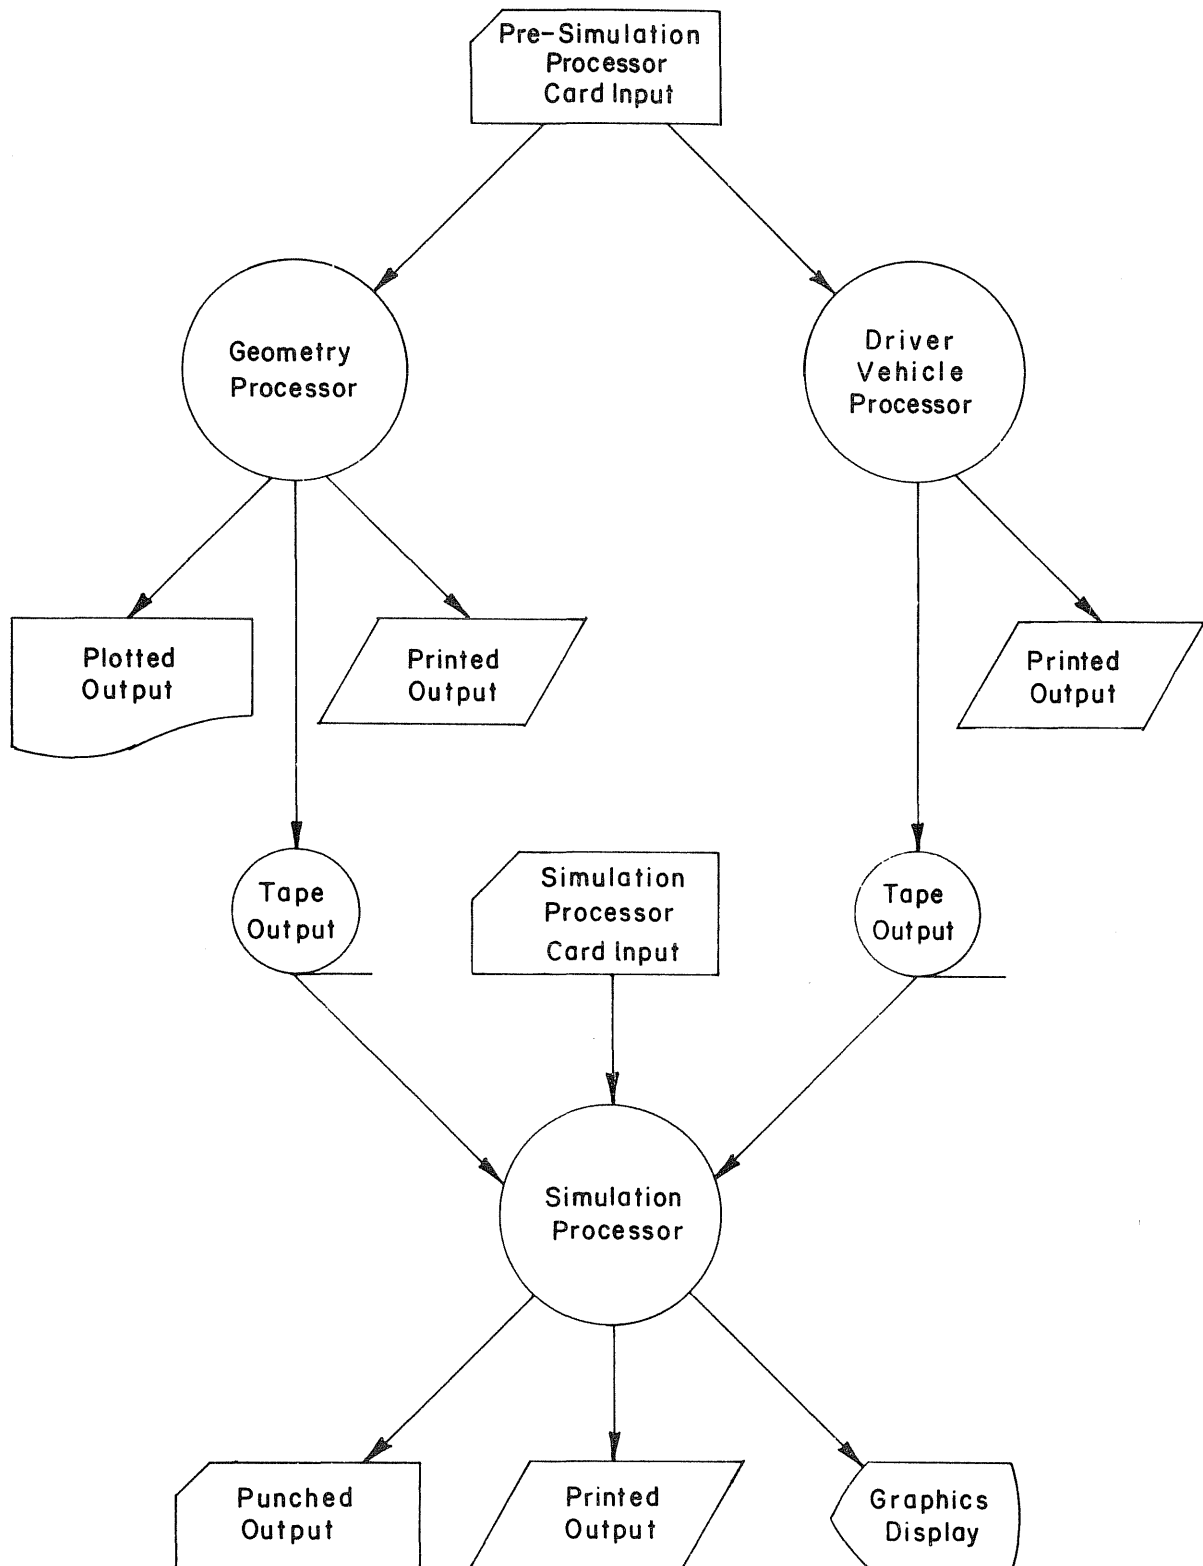


Fig 1. Flow process of the TEXAS model.

CHAPTER 2. PRE-SIMULATION PROCESSORS INPUT FORM

Both the geometry and the driver-vehicle processors use the same input form which follows. Although much of the input is self-explanatory, a guide to this input form is presented in Chapter 3.

RIGHT JUSTIFY NUMERIC CODE
LEFT JUSTIFY ALPHABETIC CODE

A. (MANDATORY) (See page 23)
(6 cards)

TITLE CARD

[illegible]

Approach numbers cannot be used more than once.

NIBA CARD

Number of inbound approaches
($1 \leq \text{NIBA} \leq 6$)

A number line with endpoints labeled 1 and 4. The segment between 1 and 4 is divided into three equal parts by two tick marks. Each of the three resulting segments is filled with a dotted pattern.

LIBA CARD

Inbound approach "A"
(1 ≤ LIBA(1) ≤ 12)

Inbound approach "B"
($1 \leq \text{LIBA}(2) \leq 12$)

Inbound approach "C"
($1 \leq \text{LIBA}(3) \leq 12$)

Inbound approach "D"
($1 \leq \text{LIBA}(4) \leq 12$)

Inbound approach "E"
($1 \leq \text{LIBA}(5) \leq 12$)

Inbound approach "F"
(1 ≤ LIBA(6) ≤ 12)

1 4
5 8
9 12
13 16
17 20
21 24

(continued)

A. (continued)

NOBA CARD

Number of outbound approaches
($1 \leq \text{NOBA} \leq 6$)

1			4

LOBA CARD

Outbound approach "A"
($1 \leq \text{LOBA}(1) \leq 12$)

1			4

Outbound approach "B"
($1 \leq \text{LOBA}(2) \leq 12$)

5			8

Outbound approach "C"
($1 \leq \text{LOBA}(3) \leq 12$)

9			12

Outbound approach "D"
($1 \leq \text{LOBA}(4) \leq 12$)

13			16

Outbound approach "E"
($1 \leq \text{LOBA}(5) \leq 12$)

17			20

Outbound approach "F"
($1 \leq \text{LOBA}(6) \leq 12$)

21			24

PARAMETERS OPTION CARD

Total number of approaches
($1 \leq \text{NAP} \leq 12$)

1			4

Number of minutes of simulation time
($12 \leq \text{ITSIM} \leq 65$)
Default = 12

5			8

Minimum time between two vehicles in the same lane
($1.0 \leq \text{HMIN} \leq 3.0$)
Default = 1.0

9			12

Number of vehicle classes
($1 \leq \text{NVEHCL} \leq 15$)
Default = 10

13			16

Number of driver classes
($1 \leq \text{NDRICL} \leq 5$)
Default = 3

17			20

Percent of left turns entering median lane
($50 \leq \text{FPERL} \leq 100$)
Default = 80

21			24

Percent of right turns entering curb lane
($50 \leq \text{FPERR} \leq 100$)
Default = 80

25			28

B.1 (MANDATORY) (See page 26)

		APPROACH CARD
Approach number	($1 \leq IA \leq 12$)	1 4 [] [] [] []
Azimuth	($0 \leq IAAZIM \leq 360$)	5 8 [] [] [] []
X coordinate	} Left (median), } beginning corner	9 12 [] [] [] []
Y coordinate		13 16 [] [] [] []
Speed limit (mph)	($10 \leq ISLIM \leq 80$)	17 20 [] [] [] []
Number of lanes	($1 \leq NLANES \leq 6$)	21 24 [] [] [] []
Number of degrees left or right of straight to be considered straight (for this approach). Default = 20 (Inbound only)		25 27 [] [] [] []
Number of degrees left or right of 180° to be considered U-turn (for this approach). Default = 10 (Inbound only)		28 30 [] [] [] []
Distribution name (page 28)	(Inbound only)	32 38 [] [] [] [] [] []
Equivalent hourly volume (vph)	(Inbound only)	40 43 [] [] [] [] [] []
Parameter for distribution	(Inbound only)	44 49 [] [] [] [] [] []
Mean speed (mph)	(Inbound only)	51 54 [] [] [] [] [] []
85 percentile speed (mph)	(Inbound only)	56 59 [] [] [] [] [] []
Percent of vehicles go to linking outbound approach "A"	(Inbound only)	60 62 [] [] [] [] [] []
Percent of vehicles go to linking outbound approach "B"	(Inbound only)	63 65 [] [] [] [] [] []
Percent of vehicles go to linking outbound approach "C"	(Inbound only)	66 68 [] [] [] [] [] []
Percent of vehicles go to linking outbound approach "D"	(Inbound only)	69 71 [] [] [] [] [] []
Percent of vehicles go to linking outbound approach "E"	(Inbound only)	72 74 [] [] [] [] [] []
Percent of vehicles go to linking outbound approach "F"	(Inbound only)	75 77 [] [] [] [] [] []
YES/NO for user supplied percent of each vehicle class making up the traffic stream (Inbound only) Default = "NO"		78 80 [] [] [] [] [] []




























B.2. (Only if B.1 Columns 78-80 are YES)

TRAFFIC MIX CARD

Percent of Class 1 vehicles in traffic stream	1				•		5
Percent of Class 2 vehicles in traffic stream	6				•		10
Percent of Class 3 vehicles in traffic stream	11				•		15
Percent of Class 4 vehicles in traffic stream	16				•		20
Percent of Class 5 vehicles in traffic stream	21				•		25
Percent of Class 6 vehicles in traffic stream	26				•		30
Percent of Class 7 vehicles in traffic stream	31				•		35
Percent of Class 8 vehicles in traffic stream	36				•		40
Percent of Class 9 vehicles in traffic stream	41				•		45
Percent of Class 10 vehicles in traffic stream	46				•		50
Percent of Class 11 vehicles in traffic stream	51				•		55
Percent of Class 12 vehicles in traffic stream	56				•		60
Percent of Class 13 vehicles in traffic stream	61				•		65
Percent of Class 14 vehicles in traffic stream	66				•		70
Percent of Class 15 vehicles in traffic stream	71				•		75

B.3 (MANDATORY - Inbound and Outbound)
(Median lane first)

LANE CARD

1. Lane width	($8 \leq \text{LWID} \leq 15$)		1 4
Lane geometry:	($0 \leq B1, E1, B2, E2 \leq 1000$)		5 8
			
	BEGIN 1 (B1)		
	END 1 (E1)		
	BEGIN 2 (B2)		
	END 2 (E2)		
"U" if 'U' turn legal	Inbound: movements which can be made from this inbound lane Outbound: movements which can be accepted by this outbound lane		22
"L" if left turn legal			23
"S" if straight through movement legal			24
"R" if right turn legal			25
Percent of approach volume in lane upon entry (at Begin1) (Inbound only)			32 34
2. Lane width	($8 \leq \text{LWID} \leq 15$)		41 44
Lane geometry:	($0 \leq B1, E1, B2, E2 \leq 1000$)		45 48
Begin 1			
End 1			
	(Same definition as 1 above)		
Begin 2			
End 2			
"U" if 'U' turn legal	(Same definition as 1 above)		62
"L" if left turn legal			63
"S" if straight through movement legal			64
"R" if right turn legal			65
Percent of approach volume in lane upon entry (at Begin1) (Inbound only)			72 74

(Repeat B.3 as required for all lanes on this approach)

(Repeat B.1 - B.3 as required for all approaches)

C.1. (MANDATORY) (See page 30)

Number of arcs
($0 \leq \text{NARCS} \leq 20$)

ARC CARD 1

1		4	

C.2. (Only if C.1 NARCS > 0)

Arc number
($1 \leq N \leq 20$)

X coordinate of center of arc
($0 \leq \text{IARCX} \leq 2250$)

Y coordinate of center of arc
($0 \leq \text{IARCY} \leq 2250$)

Beginning azimuth of arc
($0 \leq \text{IARCAZ} \leq 360$)

Number of degrees of arc (sweep)
($-360 \leq \text{IARCSW} \leq 360$)

(clockwise = positive)

Radius of arc (feet)
($1 \leq \text{IARCR} \leq 1000$)


ARC CARD 2

1		4	
5		8	
9		12	
13		16	
17		20	
21		24	

(Repeat C.2 as required)

+ number of degrees is
clockwise rotation
from beginning
azimuth

- number of degrees
is counterclockwise
rotation from
beginning
azimuth

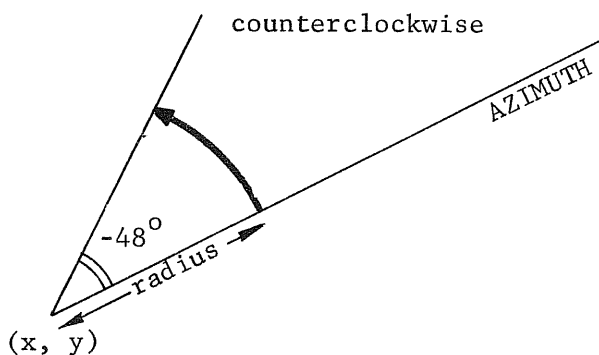

D.1. (MANDATORY) (See page 30)

Number of lines
($0 \leq \text{NLINES} \leq 100$)

LINE CARD 1

1			4

D.2. (Only if D.1 NLINES > 0)

Line number
($1 \leq N \leq 100$)

X coordinate of beginning of line
($0 \leq \text{ILX1} \leq 2250$)

Y coordinate of beginning of line
($0 \leq \text{ILY1} \leq 2250$)

X coordinate of end of line
($0 \leq \text{ILX2} \leq 2250$)

Y coordinate of end of line
($0 \leq \text{ILY2} \leq 2250$)

LINE CARD 2

1			4
5			8
9			12
13			16
17			20

(Repeat D.2 as required)

E.1. (MANDATORY) (See page 30)

Number of sight distance restrictions
(0 ≤ NSDRS ≤ 20)

SDR CARD 1

1			4

E.2. (Only if E.1 NSDRS > 0)

Sight distance restriction number
(1 ≤ N ≤ 20)

SDR CARD 2

1			4

X coordinate of sight distance restriction
(0 ≤ IXSDRC ≤ 2250)

5			8

Y coordinate of sight distance restriction
(0 ≤ IYSDRC ≤ 2250)

9			12

(Repeat E.2 as required)

F. (continued)

OUTPUT

YES/NO	for logout summary for vehicles in Vehicle Class	1	10	12
YES/NO	for logout summary for vehicles in Vehicle Class	2	13	15
YES/NO	for logout summary for vehicles in Vehicle Class	3	16	18
YES/NO	for logout summary for vehicles in Vehicle Class	4	19	21
YES/NO	for logout summary for vehicles in Vehicle Class	5	22	24
YES/NO	for logout summary for vehicles in Vehicle Class	6	25	27
YES/NO	for logout summary for vehicles in Vehicle Class	7	28	30
YES/NO	for logout summary for vehicles in Vehicle Class	8	31	33
YES/NO	for logout summary for vehicles in Vehicle Class	9	34	36
YES/NO	for logout summary for vehicles in Vehicle Class	10	37	39
YES/NO	for logout summary for vehicles in Vehicle Class	11	40	42
YES/NO	for logout summary for vehicles in Vehicle Class	12	43	45
YES/NO	for logout summary for vehicles in Vehicle Class	13	46	48
YES/NO	for logout summary for vehicles in Vehicle Class	14	49	51
YES/NO	for logout summary for vehicles in Vehicle Class	15	52	54
YES/NO	for logout summary for vehicles in Driver Class	1	55	57
YES/NO	for logout summary for vehicles in Driver Class	2	58	60
YES/NO	for logout summary for vehicles in Driver Class	3	61	63
YES/NO	for logout summary for vehicles in Driver Class	4	64	66
YES/NO	for logout summary for vehicles in Driver Class	5	67	69

G. (Only if Section F, Options Card, Columns 1-3 are YES) (See page 33)

Driver class split for each vehicle class (I = 1 to NVEHCL)
















DRIVER MIX CARD

Percent of drivers in Vehicle Class I Driver Class 1	1				5
Percent of drivers in Vehicle Class I Driver Class 2	6				10
Percent of drivers in Vehicle Class I Driver Class 3	11				15
Percent of drivers in Vehicle Class I Driver Class 4	16				20
Percent of drivers in Vehicle Class I Driver Class 5	21				25

(Repeat G as required for each vehicle class)

H. (Only if Section F, Options Card, Columns 4-6 are YES) (See page 33)
(6 cards)

VEHICLE LENGTH CARD


Length of Class 1 vehicle (5 ≤ LENV ≤ 99) (ft)	1 4 
Length of Class 2 vehicle	5 8 
Length of Class 3 vehicle	9 12 
Length of Class 4 vehicle	13 16 
Length of Class 5 vehicle	17 20 
Length of Class 6 vehicle	21 24 
Length of Class 7 vehicle	25 28 
Length of Class 8 vehicle	29 32 
Length of Class 9 vehicle	33 36 
Length of Class 10 vehicle	37 40 
Length of Class 11 vehicle	41 44 
Length of Class 12 vehicle	45 48 
Length of Class 13 vehicle	49 52 
Length of Class 14 vehicle	53 56 
Length of Class 15 vehicle	57 60 

(continued)


H. (continued)

Operating characteristics for Class 1 vehicle
 ($50 \leq \text{IVCHAR} \leq 150$)
 (< 100 = sluggish, 100 = average, > 100 = responsive)


VEHICLE OC CARD




Operating characteristics for Class 2 vehicle




Operating characteristics for Class 3 vehicle




Operating characteristics for Class 4 vehicle




Operating characteristics for Class 5 vehicle




Operating characteristics for Class 6 vehicle




Operating characteristics for Class 7 vehicle




Operating characteristics for Class 8 vehicle




Operating characteristics for Class 9 vehicle




Operating characteristics for Class 10 vehicle




Operating characteristics for Class 11 vehicle




Operating characteristics for Class 12 vehicle




Operating characteristics for Class 13 vehicle



Operating characteristics for Class 14 vehicle



Operating characteristics for Class 15 vehicle



(continued)

H. (continued)

DECEL CARD

Maximum uniform deceleration for Class 1 vehicle
 ($4 \leq IDMAX \leq 12$) (ft/sec/sec)



Maximum deceleration for Class 2 vehicle



Maximum deceleration for Class 3 vehicle



Maximum deceleration for Class 4 vehicle



Maximum deceleration for Class 5 vehicle



Maximum deceleration for Class 6 vehicle



Maximum deceleration for Class 7 vehicle




Maximum deceleration for Class 8 vehicle



Maximum deceleration for Class 9 vehicle



Maximum deceleration for Class 10 vehicle



Maximum deceleration for Class 11 vehicle



Maximum deceleration for Class 12 vehicle



Maximum deceleration for Class 13 vehicle



Maximum deceleration for Class 14 vehicle


















Maximum deceleration for Class 15 vehicle



(continued)

H. (continued)

ACCEL CARD

Maximum uniform acceleration for Class 1 vehicle ($3 \leq \text{IAMAX} \leq 18$) (ft/sec/sec)	1 4 
Maximum acceleration for Class 2 vehicle	5 8 
Maximum acceleration for Class 3 vehicle	9 12 
Maximum acceleration for Class 4 vehicle	13 16 
Maximum acceleration for Class 5 vehicle	17 20 
Maximum acceleration for Class 6 vehicle	21 24 
Maximum acceleration for Class 7 vehicle	25 28 
Maximum acceleration for Class 8 vehicle	29 32 
Maximum acceleration for Class 9 vehicle	33 36 
Maximum acceleration for Class 10 vehicle	37 40 
Maximum acceleration for Class 11 vehicle	41 44 
Maximum acceleration for Class 12 vehicle	45 48 
Maximum acceleration for Class 13 vehicle	49 52 
Maximum acceleration for Class 14 vehicle	53 56 
Maximum acceleration for Class 15 vehicle	57 60 

(continued)

H. (continued)

VELOCITY CARD


Maximum velocity for Class 1 vehicle
 $(10 \leq IVMAX \leq 235)$ (ft/sec)




Maximum velocity for Class 2 vehicle




Maximum velocity for Class 3 vehicle




Maximum velocity for Class 4 vehicle




Maximum velocity for Class 5 vehicle




Maximum velocity for Class 6 vehicle




Maximum velocity for Class 7 vehicle




Maximum velocity for Class 8 vehicle




Maximum velocity for Class 9 vehicle




Maximum velocity for Class 10 vehicle




Maximum velocity for Class 11 vehicle




Maximum velocity for Class 12 vehicle




Maximum velocity for Class 13 vehicle



Maximum velocity for Class 14 vehicle


















Maximum velocity for Class 15 vehicle



(continued)

H. (continued)

VEHICLE RADIUS CARD

Minimum turning radius for Class 1 vehicle ($4 \leq \text{IRMIN} \leq 300$) (ft)	1 4 
Minimum turning radius for Class 2 vehicle	5 8 
Minimum turning radius for Class 3 vehicle	9 12 
Minimum turning radius for Class 4 vehicle	13 16 
Minimum turning radius for Class 5 vehicle	17 20 
Minimum turning radius for Class 6 vehicle	21 24 
Minimum turning radius for Class 7 vehicle	25 28 
Minimum turning radius for Class 8 vehicle	29 32 
Minimum turning radius for Class 9 vehicle	33 36 
Minimum turning radius for Class 10 vehicle	37 40 
Minimum turning radius for Class 11 vehicle	41 44 
Minimum turning radius for Class 12 vehicle	45 48 
Minimum turning radius for Class 13 vehicle	49 52 
Minimum turning radius for Class 14 vehicle	53 56 
Minimum turning radius for Class 15 vehicle	57 60 

I. (Only if Section F, Options Card, Columns 7-9 are YES) (See page 33)
(2 cards)

DRIVER O.F. CARD

Driver operational factor for Class 1 driver

($50 \leq \text{IDCHAR} \leq 150$)

(< 100 = slow, 100 = average, > 100 = aggressive)

Driver operational factor for Class 2 driver

Driver operational factor for Class 3 driver

Driver operational factor for Class 4 driver

Driver operational factor for Class 5 driver

1				4
5				8
9				12
13				16
17				20

PIJR CARD

Perception reaction time for Class 1 driver

($0.25 \leq \text{PIJR} \leq 5.00$) (sec)

Perception reaction time for Class 2 driver

Perception reaction time for Class 3 driver

Perception reaction time for Class 4 driver

Perception reaction time for Class 5 driver

1				5
		.		
6				10
		.		
11				15
		.		
16				20
		.		
21				25
		.		

J. (OPTIONAL) (See page 33)

SPECIAL VEHICLE CARD

Queue in time (sec) (start-up plus simulation time)	110
Vehicle class (1 ≤ IVEHCL ≤ NVEHCL)	1115
Driver class (1 ≤ IDRICL ≤ NDRICL)	1620
Desired speed (ft/sec) (10 ≤ ISPD ≤ 161)	2125
Desired outbound approach (1 ≤ NOBAPD ≤ 12)	2630
Inbound approach (1 ≤ IA ≤ 12)	3135
Inbound lane (1 ≤ ILN ≤ NLANES(IA)) (Median lane = 1)	3640
1/0 for (Yes/No) logout summary for this vehicle	4145

(Repeat J as desired)

CHAPTER 3. PRE-SIMULATION PROCESSORS GUIDE

The TEXAS model incorporates two pre-processor packages which are instrumental in its efficient operation. These pre-processors perform those tasks that are normally performed only once.

(1) The geometry pre-processor program takes engineering data which describes the physical geometry of the intersection approaches and the intersection area to be studied and creates input to the traffic simulator defining the approaches, the vehicle paths in the approaches, the vehicle paths within the intersection, the traffic conflicts between the different paths within the intersection, and the available sight distances between inbound approaches.

(2) The driver-vehicle pre-processor program accepts descriptive traffic parameters and provides the traffic simulator with driver-vehicle characteristics such as queue-in time, velocity, inbound approach and lane, outbound approach, length and turning radius of the vehicle, and the reaction time and attitude of the driver.

Both pre-processors use a common input data file from which the necessary information is taken. This input guide will aid in coding the input form (i.e., the common data file).

The input coding form has 10 sections labeled A through J. Each section contains information pertaining to a certain aspect of the intersection or driver-vehicle pair. See Fig 2 for a deck schematic.

A. There are 6 cards in this section: (MANDATORY)

- (1) Title card - use the whole card for any information which you want echo-printed on the pre-processor outputs and the simulation processor output.
- (2) In column 4 - the total number of inbound approaches at the intersection - maximum 6.
- (3) On this card, the identification number for each inbound approach is listed. Any arbitrary integer between 1 and 12 may be used once.

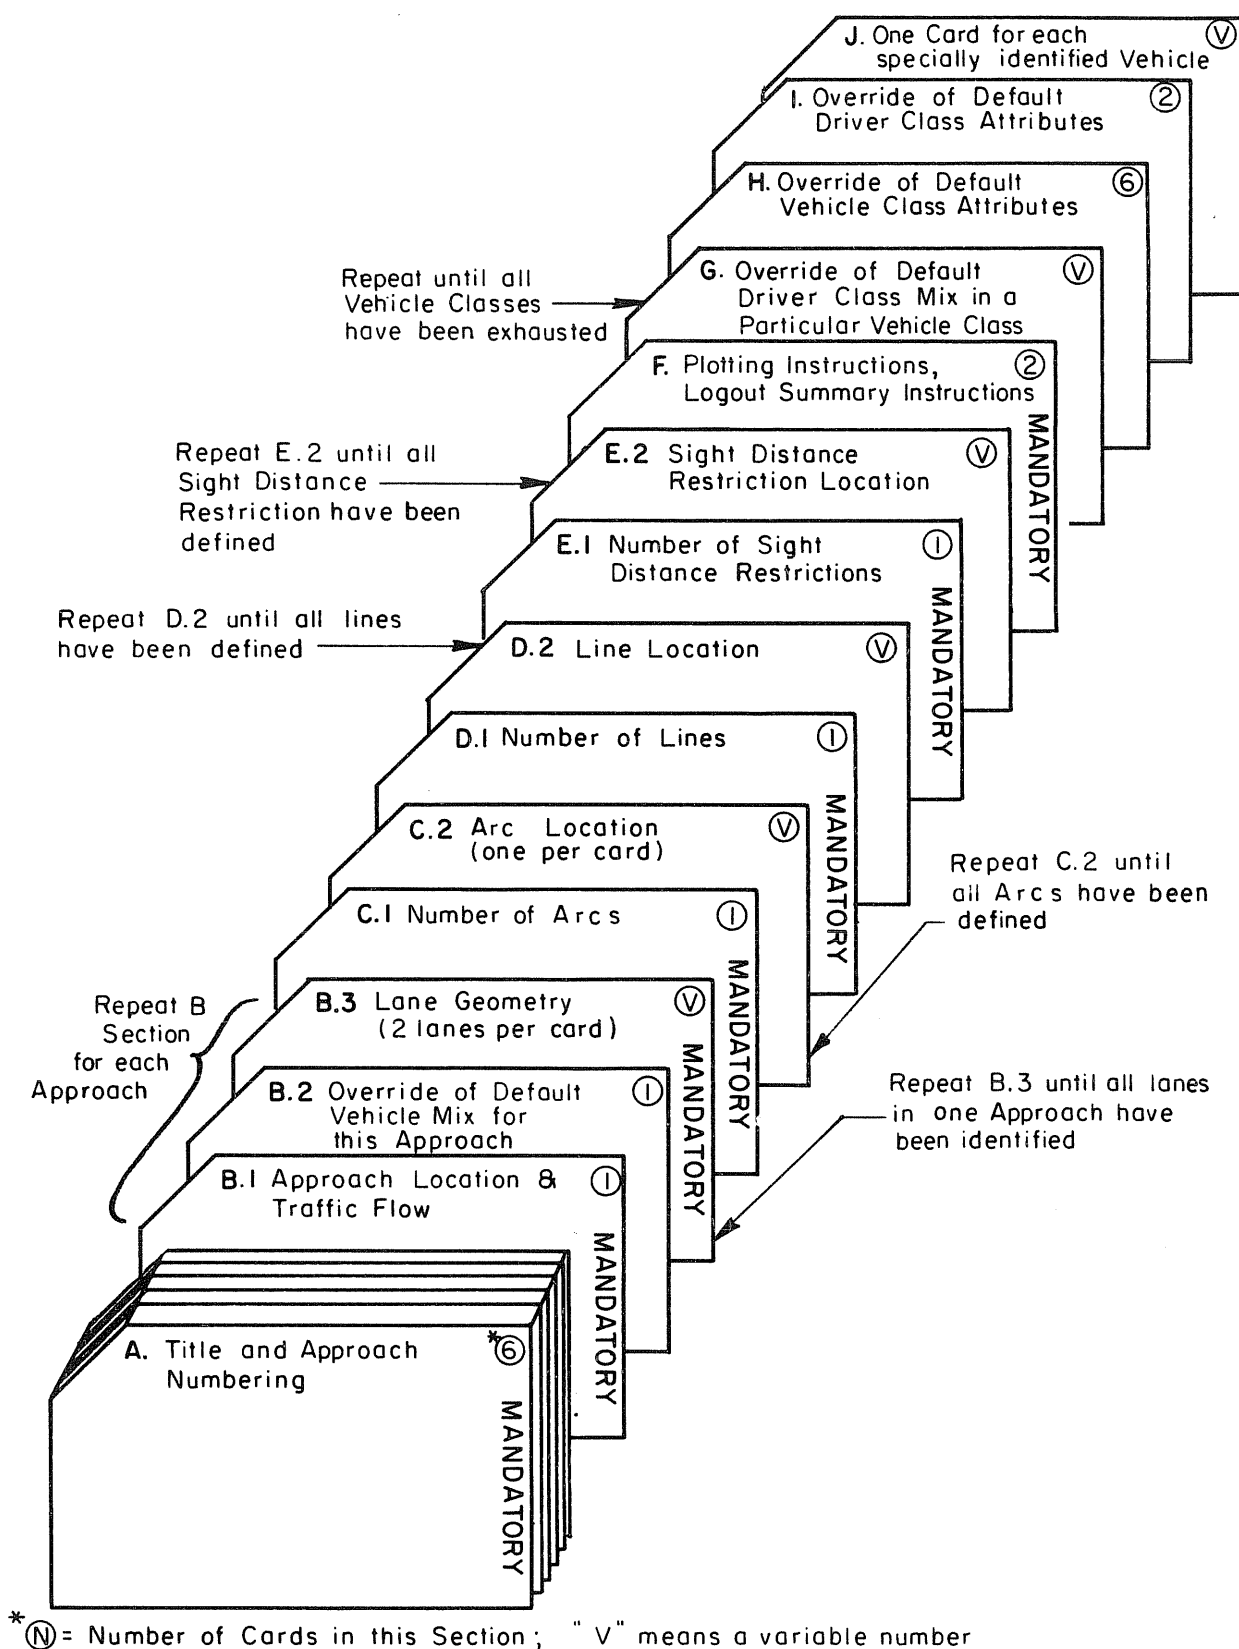


Fig 2. Pre-simulation processors input deck schematic.


- (4) In column 4 - the total number of outbound approaches at the intersection - maximum 6.
- (5) The identification number of each outbound approach. All approaches, regardless of whether they are inbound or outbound, must have different identification numbers.

(Suggestion: number the inbound approaches 1, 2, 3 . . . around the intersection. Continue numbering the outbound approaches around the intersection with the next available number.)

- (6) - Total number of approaches =
$$\begin{array}{r} \text{no. inbound} \\ + \text{no. outbound} \\ \hline \end{array}$$
- Length of simulation time - remember that under normal situations, about 2 minutes of start-up time is necessary in order to load the system.
 - The minimum headway for vehicles entering the system. If left blank, a one second headway is assumed.
 - The pre-processors have pre-programmed 10 vehicle classes (small cars, medium cars, large cars, vans, single-unit trucks, semi-trailer trucks, full trailers, recreational vehicles, buses, and sports cars) and 3 driver classes (aggressive, average, and slow). All necessary information about these classes is defaulted in the pre-processor. Only if these values are to be changed does the user need to input this information. If so, enter the number of vehicle classes and driver classes desired.
 - The percent of turning vehicles to enter the correct lane, no lane changes, at queue in time. If a turning bay, right or left, is provided, then all of the turning vehicles enter on the adjacent lane, which limits turning vehicles to one lane changing maneuver on the inbound approach.

B. There are "N" sets (B.1, B.2, B.3 combination) in this section, "N" being the total number of approaches.

B.1. The information required can be found on the following example sketch: (MANDATORY)

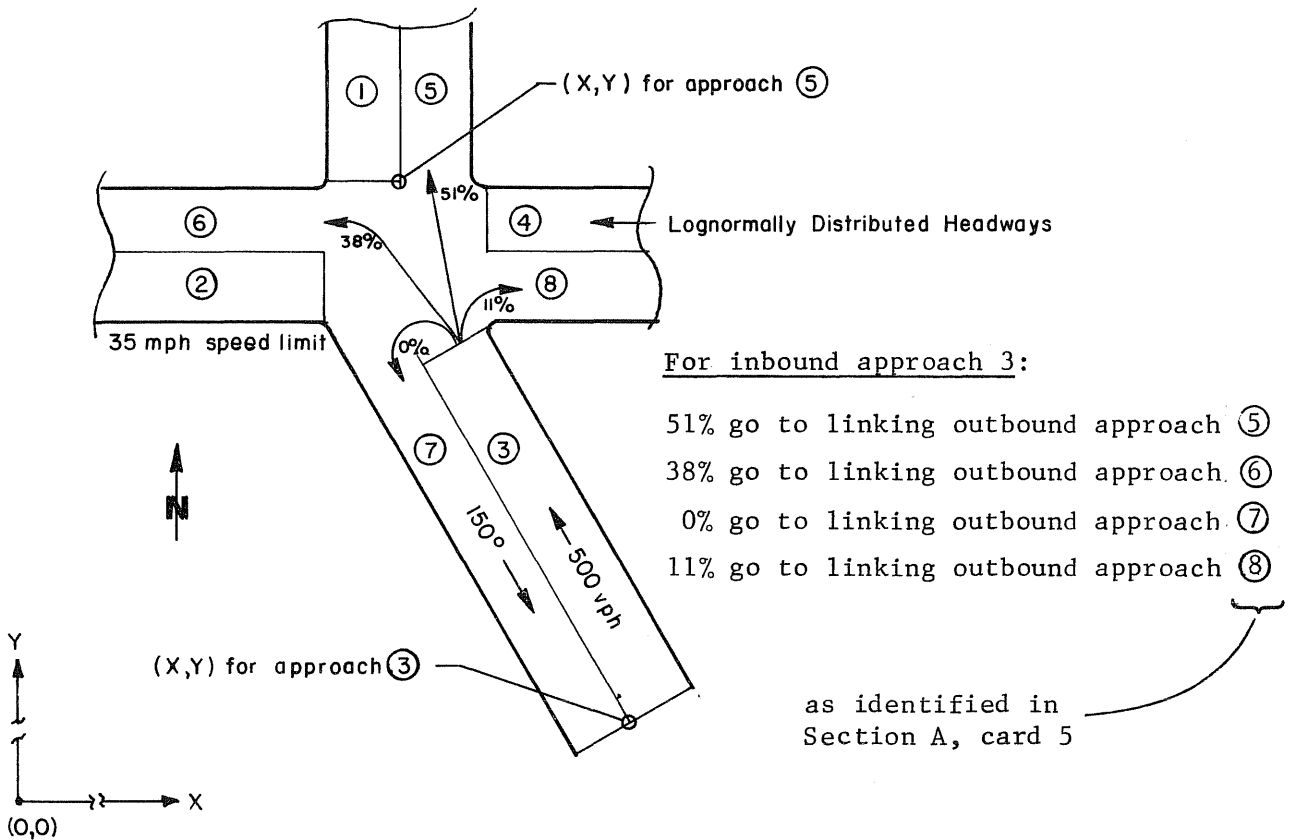

- Azimuth is measured clockwise with North as 0°. Standing at the start of the approach (inbound - away from intersection, outbound - in intersection) looking north, turn clockwise until you are looking along the approach, and the angle turned is the azimuth.
- X and Y coordinates of approach. First compute inbound approach lengths required by using the formula:

$$LEN = \frac{1.4 \times VOL}{NSTL + NTB F - NLTF} , \quad (400 \leq LEN \leq 1000).$$

LEN - Approach Length Required (Round to nearest multiple of 50 feet)

VOL - Equivalent Hourly Volume

NSTL - Number of Straight Through Lanes

NTBF - Number of Turning Bays divided by 8
 $(0.00 \leq \text{NTBF} \leq 0.25)$

NLTF - Number of Left Turn Fraction times 2
 $(0.00 \leq \text{NLTF} \leq 0.30)$

Outbound approach lengths range from 250 feet for light volumes to 400 feet for heavy volumes. After deciding on approach lengths, set up a cartesian coordinate system with the origin located in the bottom left hand corner.

- Speeds on the inbound approaches should be obtained from speed studies.
- The available headway distributions and required parameters are shown in the following table. See Appendix for a more complete discussion of headway distributions.
- In this case, since the angle between approaches 3 and 5 is 22° , the default value of 20° for straight zone will need to be overridden on card B.1 (columns 25-27). Both approaches 1 and 3 will need that value (say, 25°) specified.

Conceptualization of
Default Turn Movements

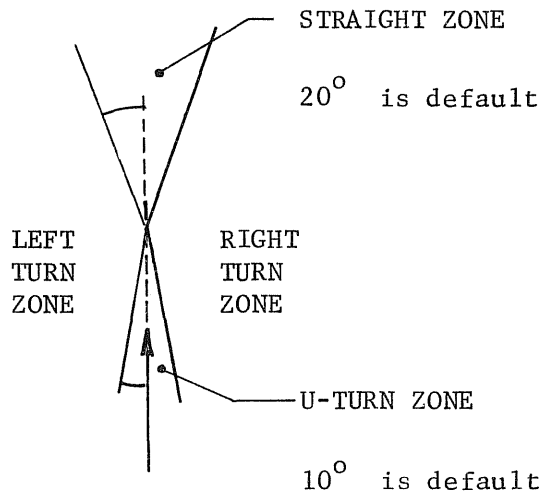


TABLE 1. HEADWAY DISTRIBUTIONS


Distribution	Parameter
U N I F O R M	Standard Deviation
L O G N R M L	Standard Deviation
N E G E X P	-
S N E G E X P	Minimum Headway
G A M M A	Mean ² / Variance
E R L A N G	Integer Value of Parameter for Gamma (can be rounded up or down)
C O N S T A N T	-

Selection of a headway distribution can be accomplished several ways. Depending on the purpose of the run, an arbitrary choice may be made. Usual practice has been to assume a shifted negative exponential (SNEGEXP) distribution, but there are indications that this is not the best distribution in many cases. Use of a supplemental program (DISFIT), developed for just this purpose, will fit all of the above distributions to a set of headways gathered by field observation and select the "best-fit." The program also gives numerical values of the required parameter for each distribution.

- B.2. - One card
- Use this section only if the user wishes to override the pre-programmed values of vehicle mix for this approach.

B.3. Lane geometry - one card for each 2 lanes in the approach.

All possible lane configurations are shown below. (MANDATORY)

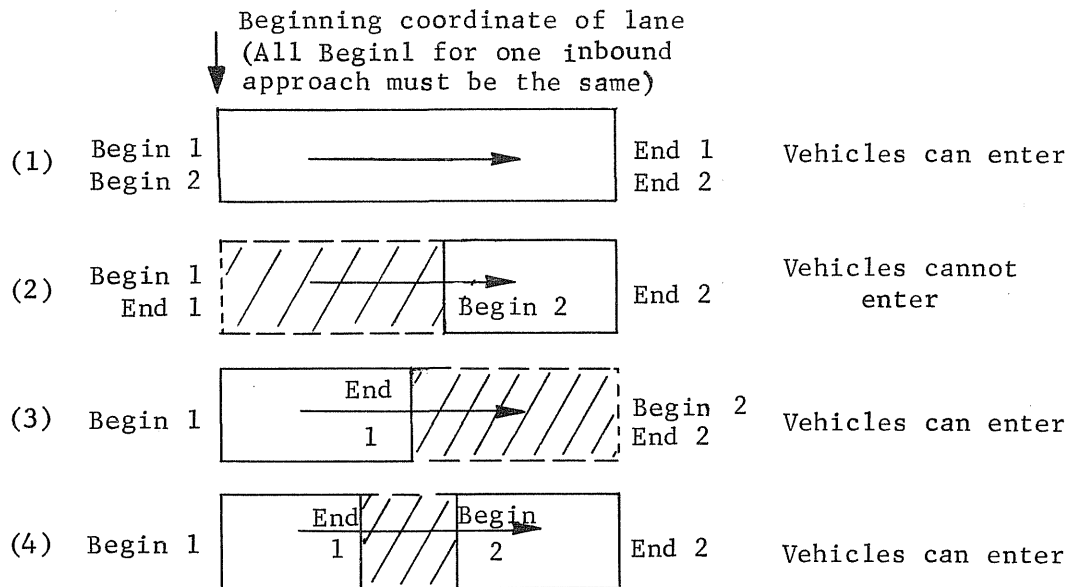

Begin 1, Begin 2, End 1, and End 2 are integer values of distance from the "beginning" of the approach.

(Inbound approaches end at the intersection,
outbound approaches begin at the intersection.)

The four conditions are:

- (1) clear lane; open at both ends;
- (2) a lane which begins at some distance down the approach; e.g., adding a left or right turn bay;
- (3) a lane which ends before the end of the approach causes merging traffic flow; dropping a lane;
- (4) a lane blocked midway down the approach.

Legal movements from each lane at the intersection are coded on this card also. The percent of approach volume entering each lane at the beginning of the approach is specified here (Inbound only).

B.3. is repeated until all lanes (median lane first) in one particular approach are exhausted; then the (B.1, B.2, B.3) combination is completed for the next approach.


C. The geometry pre-processor plots a plan view of the intersection. Lane lines, curbs, medians, etc. will be shown, but curb returns have to be defined individually.

C.1. The number of curb returns to be plotted. (MANDATORY)
(arcs)

C.2. Information required to define an arc:

+ number of degrees is
clockwise rotation
from beginning
azimuth

- number of degrees
is counterclockwise
rotation from
beginning
azimuth

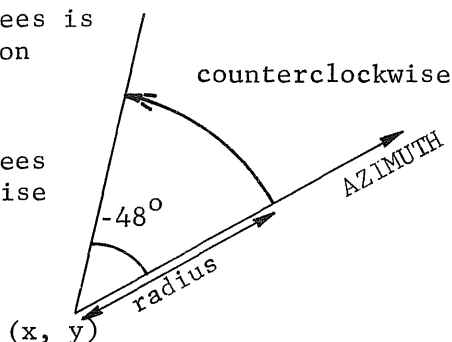

D. Any lines not defined by the approaches will be inputted here.
(STOP LINES, PED X-WALK . . .)

D.1. = Number of additional lines to be plotted (MANDATORY)

D.2. = X, Y coordinates of end points.

E. Number and location of sight distance restrictions. (E.1 IS MANDATORY)

F. Card 1 - Plotting Instructions: (MANDATORY)

Path Type: PRIMARY = Only legal movements allowed, and no lane changing in the intersection. (PRIMARY is recommended)
OPTION1 = Only legal movements allowed and vehicles may change one lane in the intersection. OPTION1 paths should not be used unless a specific case exists where the lane-change paths are necessary.

Plot Option: NOPLOT = Generate no plot
PLOT = Plot with ball point pen
PLOTI = Plot with ink pen

Plot Type: SAME = Plot all intersection paths on the same frame
SEPARATE = Plot the intersection paths from each inbound approach on a separate frame

Max Radius for Paths - Paths with larger radii than this will be replaced as straight line movements.

Clearance Distance for Conflicts - The distance from all other paths to the path in question is compared to a clearance distance. When this distance is violated, a path conflict is set at that position.

Card 2 - Input/Output Options: (MANDATORY)

Input - Enter YES if the user wishes to override the program supplied values of percent of drivers in each vehicle class, vehicle characteristics, and driver characteristics. The program supplied values are shown in Table 2, page 32.

Output - If the user wishes to have logout summaries (amount of delay, average speed, etc.) for any particular class (of vehicles or drivers), a YES should be entered in the correct columns. "NO" should be coded like this:

N	O	
---	---	--

TABLE 2. DEFAULT VALUES

		Vehicle Class and Type									
		1	2	3	4	5	6	7	8	9	10
		Small Car	Medium Car	Large Car	Vans, Mini-bus	Single- unit	Semi- trailer	Full- trailer	Recrea- tional	Bus	Sports Car
Section H overrides these	Length	15	17	19	25	30	50	55	25	35	14
	Operating Characteristic Factor	100	110	110	100	85	80	75	90	85	115
	Maximum Deceleration	16	16	16	16	12	12	12	12	12	16
	Maximum Acceleration	8	9	11	8	8	7	6	6	5	14
	Maximum Velocity	150	192	200	150	160	160	150	150	125	205
	Minimum Turning Radius	20	22	24	28	42	40	45	28	28	20
Section G overrides these	Percentage Aggressive Drivers	30	35	20	25	40	50	50	20	25	50
	Percentage Average Drivers	40	35	40	50	30	40	40	30	50	40
	Percentage Slow Drivers	30	30	40	25	30	10	10	50	25	10
Sec. B.2 overrides this	Percentage in Traffic Stream	20	32	30	15	.5	.2	.1	.2	.5	1.5
Section I overrides these	Driver Class and Type	1 Aggressive			2 Average			3 Slow			
	Driver Characteristic	110			100			85			
	Perception Reaction Time	0.5			1.0			1.5			

- G. One card for each vehicle class - even if the driver mix will be changed in only one class, all other percentages must be defined again.
- H. One card for each section.
- User supplied values of vehicle length
 - User supplied values of vehicle operating characteristics
 - User supplied values of vehicle deceleration
 - User supplied values of vehicle acceleration
 - User supplied values of vehicle velocity
 - User supplied values of minimum turning radius
- I. One card for each section.
- User supplied values of driver operational factor
 - User supplied values of perception reaction time.
- J. One card for each specially entered vehicle (chronological order).
(OPTIONAL)

CHAPTER 4. SIMULATOR INPUT FORM AND GUIDE

A. (MANDATORY)
(3 cards)

TITLE CARD

1																				
																				80

PARAMETER CARD



```
Start-up time (minutes)
(2.00 ≤ STRTIM ≤ 5.00)
(no statistics gathered)
```

1			4
	●		

```
Simulation time (minutes)
(10.00 ≤ SIMTIM ≤ 60.00)
(statistics gathered)
```

A number line from 0 to 10. The segment from 0 to 6 is shaded with dots. The segment from 6 to 10 is divided into four equal parts, with a dot in the first part (between 6 and 7).



Step increment for simulation time (seconds)
($0.50 \leq \Delta T \leq 1.50$)
(Recommended: 1.00 signal, 0.50 non-signal)

	12		15
			

Speed below which << delay below XX mph >>
is gathered (0 ≤ XX ≤ 40)


A number line from 0 to 20. The segment from 0 to 16 is shaded with dots, and the segment from 16 to 18 is shaded with diagonal lines.

Maximum clear distance for being in a queue
(4 ≤ XQDIST ≤ 40)
(30 ft recommended)

19	21
	

Traditional Car Follow Equation Parameters

"Lambda" Parameter
(2.300 \leq CAREQL \leq 4.000)
(2.800 recommended)

	23			27
				

"Mu" Parameter
(0.600 ≤ CAREQM ≤ 1.000)
(0.800 recommended)

[illegible]

"Alpha" Parameter
(0 ≤ CAREQA ≤ 4000)
(4000 recommended)

A number line from 0 to 100 with major tick marks every 10 units and minor tick marks every 1 unit. The region from 0 to 35 is shaded with dots. A bracket above the line from 35 to 38 is labeled 38.

(continued)

A. (continued)

PARAMETER CARD (cont)

Type of intersection control
(1 ≤ ICONTR ≤ 7)

40

--	--

- 1 = Uncontrolled
- 2 = Yield
- 3 = Less than all-way stop
- 4 = All-way stop
- 5 = Pretimed signal
- 6 = Semi-actuated signal
- 7 = Full-actuated signal

YES/NO for statistical summary of
individual turning movements
Default = "YES"

42

44

--	--	--	--

YES/NO for statistical summary of
each inbound approach
Default = "YES"

46

48

--	--	--	--

YES/NO for punched output of statistics
Default = "YES"

50

52


--	--	--	--

YES/NO for writing pollution tape for dispersion model
Default = "NO"

54

56

--	--	--	--

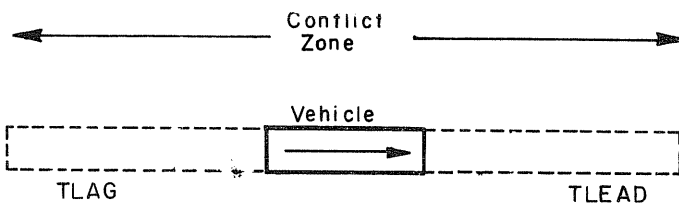

Time of lead zone for conflict checking
(1.00 ≤ TLEAD ≤ 3.00)
(1.50 recommended)

58

61

		•	
--	--	---	--

Time of lag zone for conflict checking
(1.00 ≤ TLAG ≤ 3.00)
(2.50 recommended)

63

66

		•	
--	--	---	--

(continued)

A. (continued)

Lane control for all lanes (lanes ordered
as previously in the geometry processor output)

- 1 = Outbound lane, or an inbound lane which ends before the intersection
- 2 = Uncontrolled
- 3 = Yield sign
- 4 = Stop sign
- 5 = Signal
- 6 = Signal with left turn on red
- 7 = Signal with right turn on red

LANE CONTROL CARD

Lane Number 1	1 <input type="text"/>	14 <input type="text"/>	27 <input type="text"/>	40 <input type="text"/>
Lane Number 2	2 <input type="text"/>	15 <input type="text"/>	28 <input type="text"/>	41 <input type="text"/>
Lane Number 3	3 <input type="text"/>	16 <input type="text"/>	29 <input type="text"/>	42 <input type="text"/>
.	4 <input type="text"/>	17 <input type="text"/>	30 <input type="text"/>	43 <input type="text"/>
.	5 <input type="text"/>	18 <input type="text"/>	31 <input type="text"/>	44 <input type="text"/>
.	6 <input type="text"/>	19 <input type="text"/>	32 <input type="text"/>	45 <input type="text"/>
	7 <input type="text"/>	20 <input type="text"/>	33 <input type="text"/>	46 <input type="text"/>
	8 <input type="text"/>	21 <input type="text"/>	34 <input type="text"/>	47 <input type="text"/>
	9 <input type="text"/>	22 <input type="text"/>	35 <input type="text"/>	48 <input type="text"/>
	10 <input type="text"/>	23 <input type="text"/>	36 <input type="text"/>	49 <input type="text"/>
	11 <input type="text"/>	24 <input type="text"/>	37 <input type="text"/>	50 <input type="text"/>
	12 <input type="text"/>	25 <input type="text"/>	38 <input type="text"/>	
	13 <input type="text"/>	26 <input type="text"/>	39 <input type="text"/>	

- B. Cam stack information
(Only if Section A, Parameter Card, Column 40 is a 5, 6, or 7)

CAM STACK CARD 1

- B.1. Number of signal controller cam stack positions
($4 \leq \text{NCAMSP} \leq 72$)



Each new set of signal indications is an additional cam stack position

B.2. One card for each cam stack position

CAM STACK CARD 2

Phase number in which this cam stack
position is contained
($1 \leq \text{ICAMPH} \leq 8$)

2	

Time span of cam stack position (seconds)
($\text{TCAMSP} \geq 1$ only if $\text{ICONTR} = 5$)

3	5

The three-digit code (see following page) -
this defines the signal indication
that faces each inbound lane shown

Inbound lanes ordered as in the geometry processor output

Every inbound lane's cam stack position must be coded
(including channelized right turns and blocked lanes)

Inbound Lane Number 1	<table border="1"> <tr><td>6</td><td>8</td></tr> <tr><td></td><td></td></tr> </table>	6	8			Lane Number 14	<table border="1"> <tr><td>45</td><td>47</td></tr> <tr><td></td><td></td></tr> </table>	45	47		
6	8										
45	47										
Lane Number 2	<table border="1"> <tr><td>9</td><td>11</td></tr> <tr><td></td><td></td></tr> </table>	9	11			Lane Number 15	<table border="1"> <tr><td>48</td><td>50</td></tr> <tr><td></td><td></td></tr> </table>	48	50		
9	11										
48	50										
Lane Number 3	<table border="1"> <tr><td>12</td><td>14</td></tr> <tr><td></td><td></td></tr> </table>	12	14			Lane Number 16	<table border="1"> <tr><td>51</td><td>53</td></tr> <tr><td></td><td></td></tr> </table>	51	53		
12	14										
51	53										
Lane Number 4	<table border="1"> <tr><td>15</td><td>17</td></tr> <tr><td></td><td></td></tr> </table>	15	17			Lane Number 17	<table border="1"> <tr><td>54</td><td>56</td></tr> <tr><td></td><td></td></tr> </table>	54	56		
15	17										
54	56										
Lane Number 5	<table border="1"> <tr><td>18</td><td>20</td></tr> <tr><td></td><td></td></tr> </table>	18	20			Lane Number 18	<table border="1"> <tr><td>57</td><td>59</td></tr> <tr><td></td><td></td></tr> </table>	57	59		
18	20										
57	59										
Lane Number 6	<table border="1"> <tr><td>21</td><td>23</td></tr> <tr><td></td><td></td></tr> </table>	21	23			Lane Number 19	<table border="1"> <tr><td>60</td><td>62</td></tr> <tr><td></td><td></td></tr> </table>	60	62		
21	23										
60	62										
Lane Number 7	<table border="1"> <tr><td>24</td><td>26</td></tr> <tr><td></td><td></td></tr> </table>	24	26			Lane Number 20	<table border="1"> <tr><td>63</td><td>65</td></tr> <tr><td></td><td></td></tr> </table>	63	65		
24	26										
63	65										
Lane Number 8	<table border="1"> <tr><td>27</td><td>29</td></tr> <tr><td></td><td></td></tr> </table>	27	29			Lane Number 21	<table border="1"> <tr><td>66</td><td>68</td></tr> <tr><td></td><td></td></tr> </table>	66	68		
27	29										
66	68										
Lane Number 9	<table border="1"> <tr><td>30</td><td>32</td></tr> <tr><td></td><td></td></tr> </table>	30	32			Lane Number 22	<table border="1"> <tr><td>69</td><td>71</td></tr> <tr><td></td><td></td></tr> </table>	69	71		
30	32										
69	71										
Lane Number 10	<table border="1"> <tr><td>33</td><td>35</td></tr> <tr><td></td><td></td></tr> </table>	33	35			Lane Number 23	<table border="1"> <tr><td>72</td><td>74</td></tr> <tr><td></td><td></td></tr> </table>	72	74		
33	35										
72	74										
Lane Number 11	<table border="1"> <tr><td>36</td><td>38</td></tr> <tr><td></td><td></td></tr> </table>	36	38			Lane Number 24	<table border="1"> <tr><td>75</td><td>77</td></tr> <tr><td></td><td></td></tr> </table>	75	77		
36	38										
75	77										
Lane Number 12	<table border="1"> <tr><td>39</td><td>41</td></tr> <tr><td></td><td></td></tr> </table>	39	41			Lane Number 25	<table border="1"> <tr><td>78</td><td>80</td></tr> <tr><td></td><td></td></tr> </table>	78	80		
39	41										
78	80										
Lane Number 13	<table border="1"> <tr><td>42</td><td>44</td></tr> <tr><td></td><td></td></tr> </table>	42	44								
42	44										

Three-Digit Signal Codes

Position 1 = Turn code
 Position 2 = Indication for turn code in Position 1
 Position 3 = Indication for all other allowable movements
 from this lane

AG = All allowable movements green
 AA = All allowable movements amber
 AR = All allowable movements red
 AP = All allowable movements protected green
 LGA = Left turn green, all other allowable movements amber
 LGR = Left turn green, all other allowable movements red
 LAG = Left turn amber, all other allowable movements green
 LAR = Left turn amber, all other allowable movements red
 LRG = Left turn red, all other allowable movements green
 LRA = Left turn red, all other allowable movements amber
 LPG = Left turn protected green, all other allowable movements green
 LPA = Left turn protected green, all other allowable movements amber
 LPR = Left turn protected green, all other allowable movements red
 SGA = Straight green, all other allowable movements amber
 SGR = Straight green, all other allowable movements red
 SAG = Straight amber, all other allowable movements green
 SAR = Straight amber, all other allowable movements red
 SRG = Straight red, all other allowable movements green
 SRA = Straight red, all other allowable movements amber
 RGA = Right green, all other allowable movements amber
 RGR = Right green, all other allowable movements red
 RAG = Right amber, all other allowable movements green
 RAR = Right amber, all other allowable movements red
 RRG = Right red, all other allowable movements green
 RRA = Right red, all other allowable movements amber
 UNS = Unsignalized lane (channelized right turn, or blocked lane)

Note: In order to reduce the amount of coding needed, it is not necessary to duplicate the code for several cam stack positions if the signal indication remains the same. For example, if Lane 7 has an AR code for cam stack positions 2 through 8, then only cam stack position 2 need be coded AR. The remainder (3,4,5,6,7, and 8) may be left blank for Lane 7.

- C. Semi-actuated controller information
(Only if Section A, Parameter Card, Column 40 = 6)

PHASE CARD 1

- C.1. Number of controller phases
($2 \leq \text{NPHASE} \leq 8$)

1			4
			

C.2. Major street phase information


PHASE CARD 2

2


Phase number




Minimum assured green (sec)



Amber clearance interval (sec)




All-red clearance interval (sec)




Number of phases which can be cleared to
directly from this phase
($1 \leq \text{NPHNXT} \leq 7$)




Phase number of the first phase which can be
cleared to directly from this phase
($1 \leq \text{LPHNXT}(1) \leq \text{NPHNXT}$)



Phase number ... second ...
($1 \leq \text{LPHNXT}(2) \leq \text{NPHNXT}$)



third




fourth



fifth



sixth



seventh



C.3. Minor street(s) phase information
(2 cards - one set for each minor phase)

Phase number

($2 \leq \text{IPHASE} \leq \text{NPHASE}$)

Initial interval (sec)

($\text{TII} \geq \text{DT}$)

Vehicle interval (sec)

($\text{TVI} \geq \text{DT}$)

Amber clearance interval (sec)

($\text{TCI} \geq 0.0$)

All-red clearance interval (sec)

($\text{TAR} \geq 0.0$)

Maximum extension (sec)

($\text{TMX} \geq 0.0$)

ON/OFF for skip phase switch position

Default = "OFF"

ON/OFF for recall switch position

Default = "OFF"

YES/NO is this phase controlled by a minor
movement controller attached to a
parent phase?

Default = "NO"

YES/NO is this a dual left phase which will be
followed on the cam stack by the two corresponding
single left phases (i.e., $A_{xy} \rightarrow A_x \rightarrow A_y$)

Default = "NO"

AND/OR for the type of interconnection between
the detectors on this phase (AND is a series
connection, OR is a parallel connection)

Default = "OR"

See Examples 1 and 2 on pages 51 and 52 for
coding detector information.























Number of detectors attached to this phase

($1 \leq \text{NLD} \leq 10$)

Number of phases which can be cleared to directly
from this phase

($1 \leq \text{NPHNXT} \leq 7$)

PHASE CARD 3

2			
			
3			7
			
8			12
			
13			17
			
18			22
			
23			28
			
29			32
			
33			36
			
37			40
			
41			44
			
45			48
			
49			52
			
53			56
			


(continued)

C.3. (continued)

PHASE CARD 3 (cont)

58

Phase number of the first phase which can be
cleared to directly from this phase
($1 \leq \text{LPHNXT}(1) \leq \text{NPHNXT}$)



60

Phase number ... second ...
($1 \leq \text{LPHNXT}(2) \leq \text{NPHNXT}$)



62

third



64

fourth



66

fifth



68

sixth



70

seventh



(continued)

C.3. (continued)

List of detector numbers attached to this phase.
A "NOT" connection should be coded with a minus
sign (i.e., as a negative number).

If the first detector is negative, a "NOT" connection,
then the remainder of the detectors must be negative;
which implies an ALL-RED REST Phase.

(Note: All positive connected detectors should be
coded first, then the negative connected detectors
should be coded.)

See Example 2, page 52, for the correct usage of
the "NOT" connection.

PHASE DETECTOR CARD

1		4	
5		8	
9		12	
13		16	
17		20	
21		24	
25		28	
29		32	
33		36	
37		40	

- D. Full-actuated controller information
(Only if Section A, Parameter Card, Column 40 = 7)

PHASE CARD 1

1 4

- D.1. Number of controller phases
($2 \leq \text{NPHASE} \leq 8$)

--	--	--	--

D.2. (2 cards - one set for each controller phase)

PHASE CARD 2

Phase number

 $(1 \leq \text{IPHASE} \leq \text{NPHASE})$

Initial interval (sec)

 $(\text{TII} \geq \text{DT})$

Vehicle interval (sec)

 $(\text{TVI} \geq \text{DT})$

Amber clearance interval (sec)

 $(\text{TCI} \geq 0.0)$

All-red clearance interval (sec)

 $(\text{TAR} \geq 0.0)$

Maximum extension (sec)

 $(\text{TMX} \geq 0.0)$

ON/OFF for skip phase switch position

Default = "OFF"

ON/OFF for recall switch position

Default = "OFF"

YES/NO for is this phase controlled by a minor movement controller attached to a parent phase?

Default = "NO"

YES/NO for is this a dual left phase which will be followed on the cam stack by the two corresponding single left phases (i.e., $A_{xy} \rightarrow A_x \rightarrow A_y$)

Default = "NO"

AND/OR for the type of interconnection between the detectors on this phase (AND is a series connection, OR is a parallel connection)
See Examples 1 and 2 on pages 51 and 52 for coding detector information.
Default = "OR"

Number of detectors attached to this phase

 $(1 \leq \text{NLD} \leq 10)$

Number of phases which can be cleared to directly from this phase

 $(1 \leq \text{NPHNXT} \leq 7)$


				2			
3				7			
8				12			
13				17			
18				22			
23				28			
29				32			
33				36			
37				40			
41				44			
45				48			
49				52			
53				56			

(continued)


D.2. (continued)

PHASE CARD 2 (cont)


Phase number of the first phase which
can be cleared to directly from this phase
($1 \leq \text{LPHNXT}(1) \leq \text{NPHNXT}$)




Phase number ... second ...
($1 \leq \text{LPHNXT}(2) \leq \text{NPHNXT}$)




third




fourth




fifth



sixth



seventh



(continued)

D.2. (continued)

List of detector numbers attached to this phase.
A "NOT" connection should be coded with a minus
sign (i.e., as a negative number).

If the first detector is negative, a "NOT" connection,
then the remainder of the detectors must be negative;
which implies an ALL-RED REST Phase.

(Note: All positive connected detectors should be
coded first, then the negative connected detectors
should be coded.)

See Example 2, page 52, for the correct usage of
the "NOT" connection.

PHASE DETECTOR CARD

1			4
5			8
9			12
13			16
17			20
21			24
25			28
29			32
33			36
37			40

- E. Detector location information for actuated signal
(Only if Section A, Parameter Card, Column 40 equals 6 or 7)

DETECTOR CARD 1

- E.1. Total number of detectors
($0 \leq \text{NLOOPS} \leq 20$)

1	4

E.2. One card for each detector

DETECTOR CARD 2

Detector number
($1 \leq N \leq 20$)

Detector type < PULSE > or
< PRESENCE >
Default = "PRESENCE"


























Distance down lane to beginning of detector
($0 \leq \text{STRTLD} \leq 1000$)

Distance down lane to end of detector
($0 \leq \text{STOPLD} \leq 1000$)

Approach number in which the detector is located
(as numbered in GEOMETRY PROCESSOR INPUT)
($1 \leq \text{IA} \leq \text{NAP} \leq 12$)

Number of lanes covered by this detector
($1 \leq \text{NLDLN} \leq 6$)

List of lanes covered by this detector


		2					
3					11		
	P			S	E		
		12				16	
							
		17				20	
		21				24	
							
		25				28	
							
		29				32	
							
		33				36	
							
		37				40	
							
		41				44	
							
		45				48	
							
		49				52	
							

Coding Detector Information

For full-actuated and semi-actuated controllers, vehicle detectors on the approaches allow for a demand to be set on the phase to which each detector is connected. More than one detector may be connected to a phase (the "or" case).

The following example illustrates the coding for detectors required with a 2-phase controller.

Example 1. Full-actuated 2-phase controller

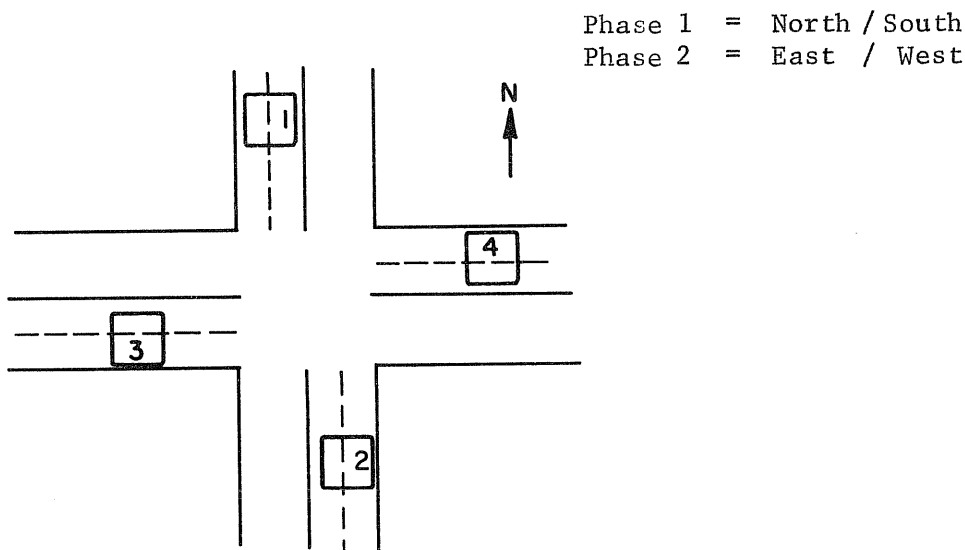


Phase 1 is demanded when either No. 1 or No. 2 is tripped.

Phase 2 is demanded when either No. 3 or No. 4 is tripped.


Section D.2 should look like this:

[illegible]



Example 2. Fully-skippable 5-phase. This example follows the traffic signal sequence example in the SDHPT Manual on Uniform Traffic Control Devices, pages III-L-30, 31 (see next two pages). As diagrammed there, phase A (X + Y) is the overlap of phases A (X) and A (Y). However, this model allows only one phase to be entered at a time; hence, the "extra phase."

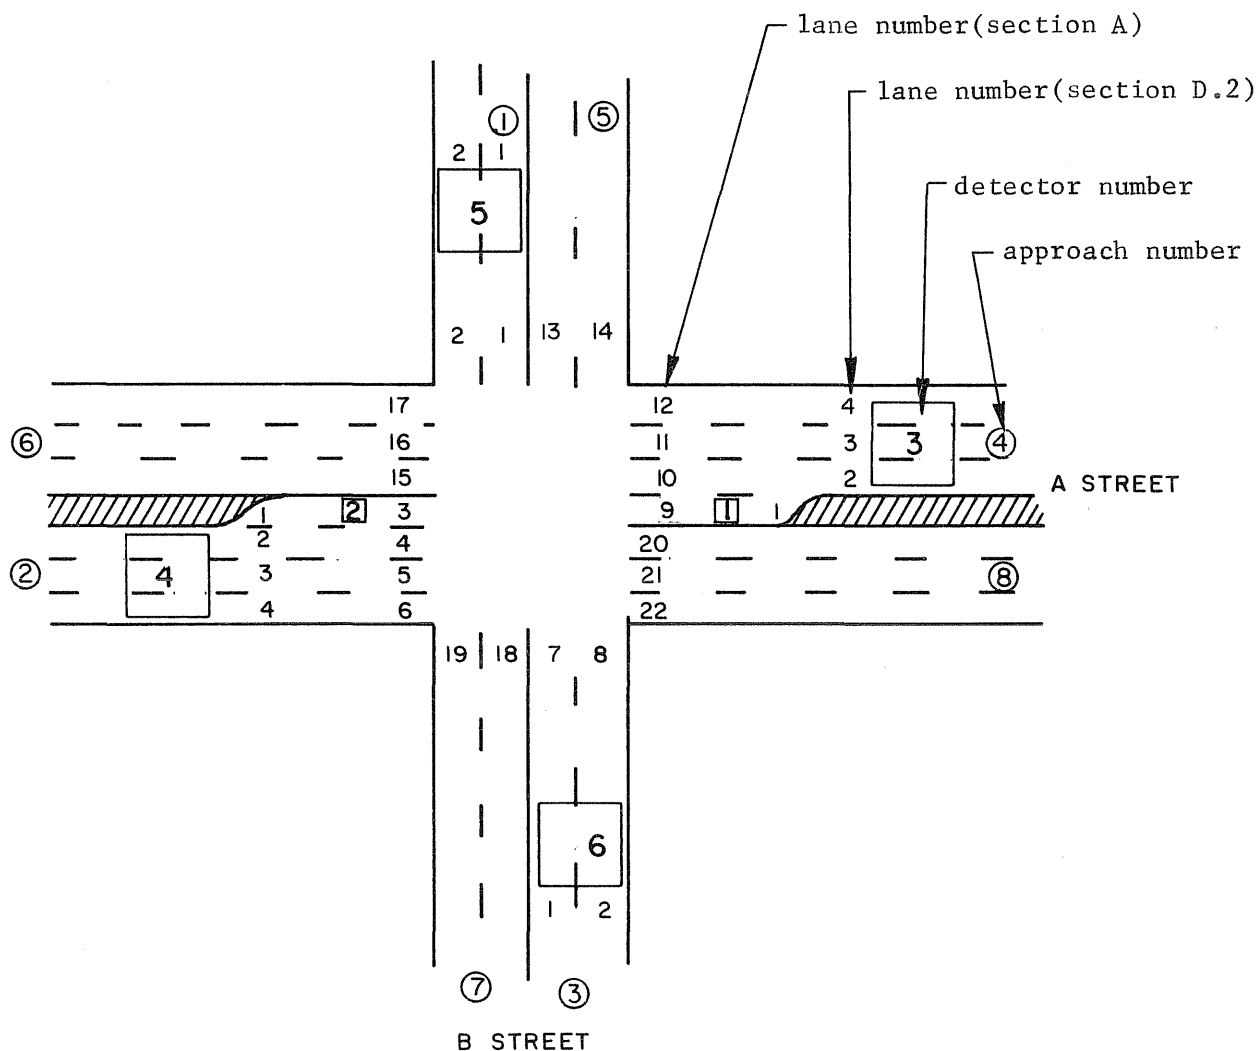

Phase 1	=	A (X + Y)	(dual left on A Street)
2	=	A (X)	(single left from East)
3	=	A (Y)	(single left from West)
4	=	A	(East-West)
5	=	B	(North-South)

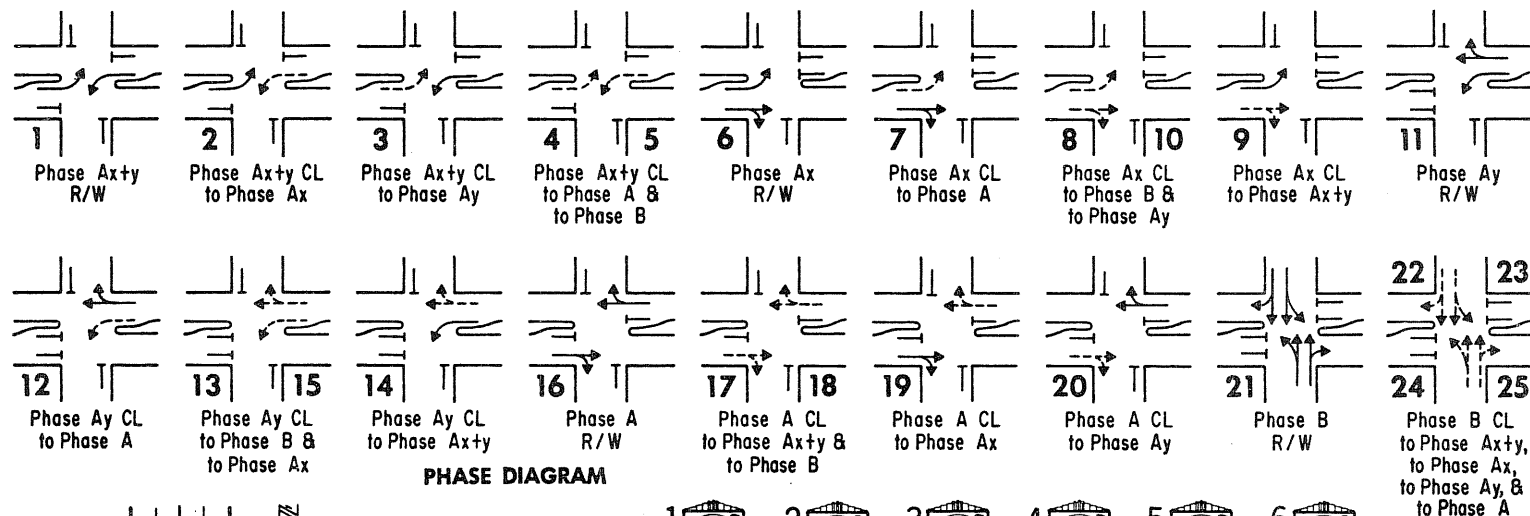

PHASE DIAGRAM

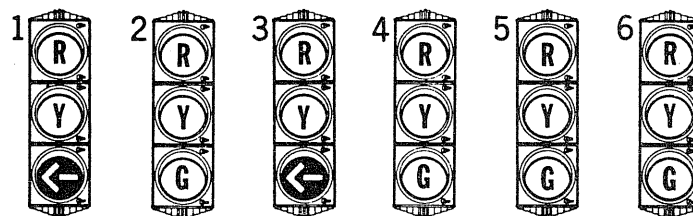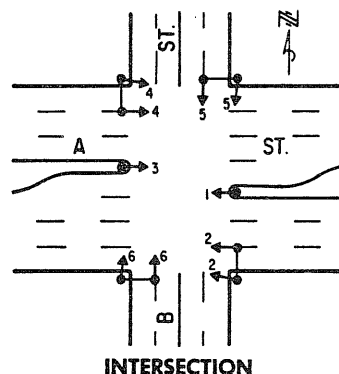

SIGNAL FACES

TRAFFIC SIGNAL SEQUENCE

Multi-Phase Operation with Channelized Left Turn Lanes and Protected Left Turn Phases
on Major Street Approaches - Circular Greens on Street with Protected Left Turn Phases

SOURCE: State Department of Highways and Public Transportation, Division of Maintenance Operations, Texas Manual on Uniform Traffic Control Devices for Streets and Highways, vol. 2, (Austin, Texas: 1973), p. III-L-30.

		1					2					3					4					5				
		PHASE Ax + y					PHASE Ax					PHASE Ay					PHASE A					PHASE B				
SIGNAL		R / W	CL to Ax	CL to Ay	CL to A	CL to B	R / W	CL to A	CL to B	CL to Ax+y	CL to Ay	R / W	CL to A	CL to B	CL to Ax+y	CL to Ax	R / W	CL to B	CL to Ax+y	CL to Ax	CL to Ay	R / W	CL to Ax+y	CL to Ax	CL to Ay	CL to A
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
1.	A ST EB LT	←	←	Y	Y	Y	←	Y	Y	←	Y	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R
2.	A ST EB	R	R	R	R	R	G	G	Y	Y	Y	R	R	R	R	R	G	Y	Y	G	Y	R	R	R	R	R
3.	A ST WB LT	←	Y	←	Y	Y	R	R	R	R	R	←	Y	Y	←	Y	R	R	R	R	R	R	R	R	R	R
4.	A ST WB	R	R	R	R	R	R	R	R	R	R	G	G	Y	Y	Y	G	Y	Y	Y	G	R	R	R	R	R
5.	B ST NB	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	G	Y	Y	Y	Y
6.	B ST SB	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	G	Y	Y	Y	Y

NOTES:

1. Right Turn Arrows may be added on B Street.
2. Any face may be Span Wire Mounted, Mast Arm Mounted, or Mast Arm and Post Top or Bracketed as shown.
3. Not all of the changes shown may be possible, depending upon the type of Controller and Detectors, if any.
4. Faces 1 and 3 should be accompanied by sign "LEFT ON ARROW ONLY," and should have Louvers.

TRAFFIC SIGNAL SEQUENCE

Multi-Phase Operation with Channelized Left Turn Lanes and Protected Left Turn Phases
on Major Street Approaches - Circular Greens on Street with Protected Left Turn Phases

SOURCE: State Department of Highways and Public Transportation, Division of Maintenance Operations, Texas Manual on Uniform Traffic Control Devices for Streets and Highways, vol. 2, (Austin, Texas: 1973), p. III-L-31.

Phase 1 may be entered only if detectors 1 and 2 have registered a demand on red.

Phase 2 is demanded by detector no. 2 alone. If detector no. 1 is demanded also, there is not demand for this phase; hence, an "AND NOT" connection.

Phase 3 is demanded by detector 1 alone.

Phase 4 is demanded by detectors 3 or 4.

Phase 5 is demanded by detectors 5 or 6.

The entire listing of the simulator processor input for Example 2 is shown on the following page.

For the dual left phase (Phase 1) the value of $TII + TVI$ must be the minimum of $TII + TVI$ for the two separate left turn phases (Phases 2 and 3). The value of TMX for Phase 1 must also be the minimum TMX of Phases 2 and 3. The clearance intervals TCI and TAR for Phase 1 must be the maximum of the like variables of Phases 2 and 3.

Example 3. Full-actuated 2-phase with 2 minor movement controllers. This must be modeled as a 5-phase controller with the restrictions explained below. This example is similar to Example 2 (being the same intersection with the same loop locations).

A minor movement controller leads the parent and therefore can clear only to its parent. However, an A(X + Y) can gap-out to an A(X) or an A(Y) and then from there to its parent phase. Additionally, it must be known if this is a minor movement phase so that demand on red can be effected as soon as the minor phase is entered. This insures that the cam stack will not rest in a minor movement position but will gap-out to its parent phase.

Again, this example is similar to the signal sequence example in the SDHPT Manual on Uniform Traffic Control Devices, pages III-L-30, 31, except that cam stack positions 5, 8, 9, 10, 13, 14, and 15 have been eliminated.

The entire listing of the simulator processor input for Example 3 is shown on the following page.

Phase 1 = A (X + Y)	Both minors
2 = A (X)	
3 = A (Y)	
4 = A	Parent
5 = B	

For a minor phase, the last phase on the list of phases which can be cleared to directly should be the parent phase associated with the minor phase.


CHAPTER 5. CASE STUDY: 35th AND JEFFERSON STREET INTERSECTION

This intersection is located in suburban Austin at the crossing of an artery and a collector street, both experiencing medium to heavy volumes during peak periods. A pretimed two-phase signal controller is in place at the intersection, running a 60-second cycle normally and extending to an 86-second cycle during peaks.


The necessary input for the driver-vehicle processor was gathered by a traffic-survey crew. Volumes in each approach, lane occupancy, and spot speeds were measured. Headway data were gathered for analysis by the distribution fitting program, DISFIT.

Some time was spent also at the intersection gathering geometric data for the other pre-simulation processor; the geometry processor. Lane widths, azimuths of approaches, and locations of left turn bays were noted. A sketch of the intersection is shown on the following page with each approach numbered. Eight hundred feet was chosen as the length for each inbound approach, and four hundred feet for the outbound approaches. A plan view of the intersection is shown on the next page after the sketch giving the cartesian coordinates of required points. Lane widths and azimuths are also shown for each approach.

Following the photographs of the intersection, the coding form containing the input to the pre-processors is shown; then, two CalComp plots of the intersection produced by the geometry processor; then, the coding form for the card input to the simulation model. Finally, there appear some selected output from an actual simulation run.

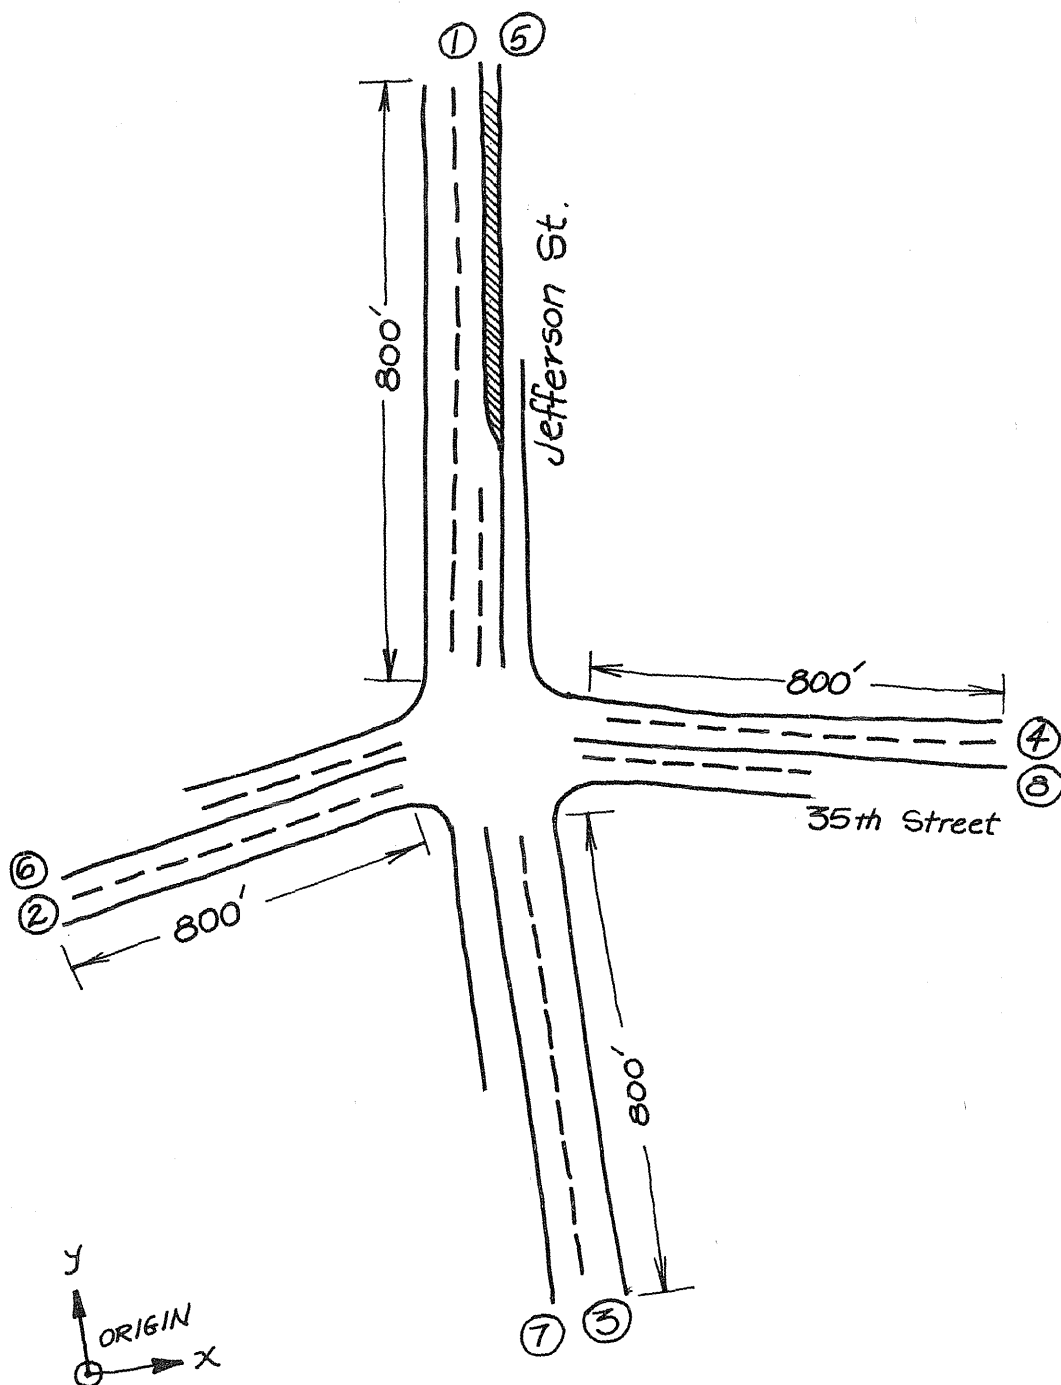

Sketch of the intersection.

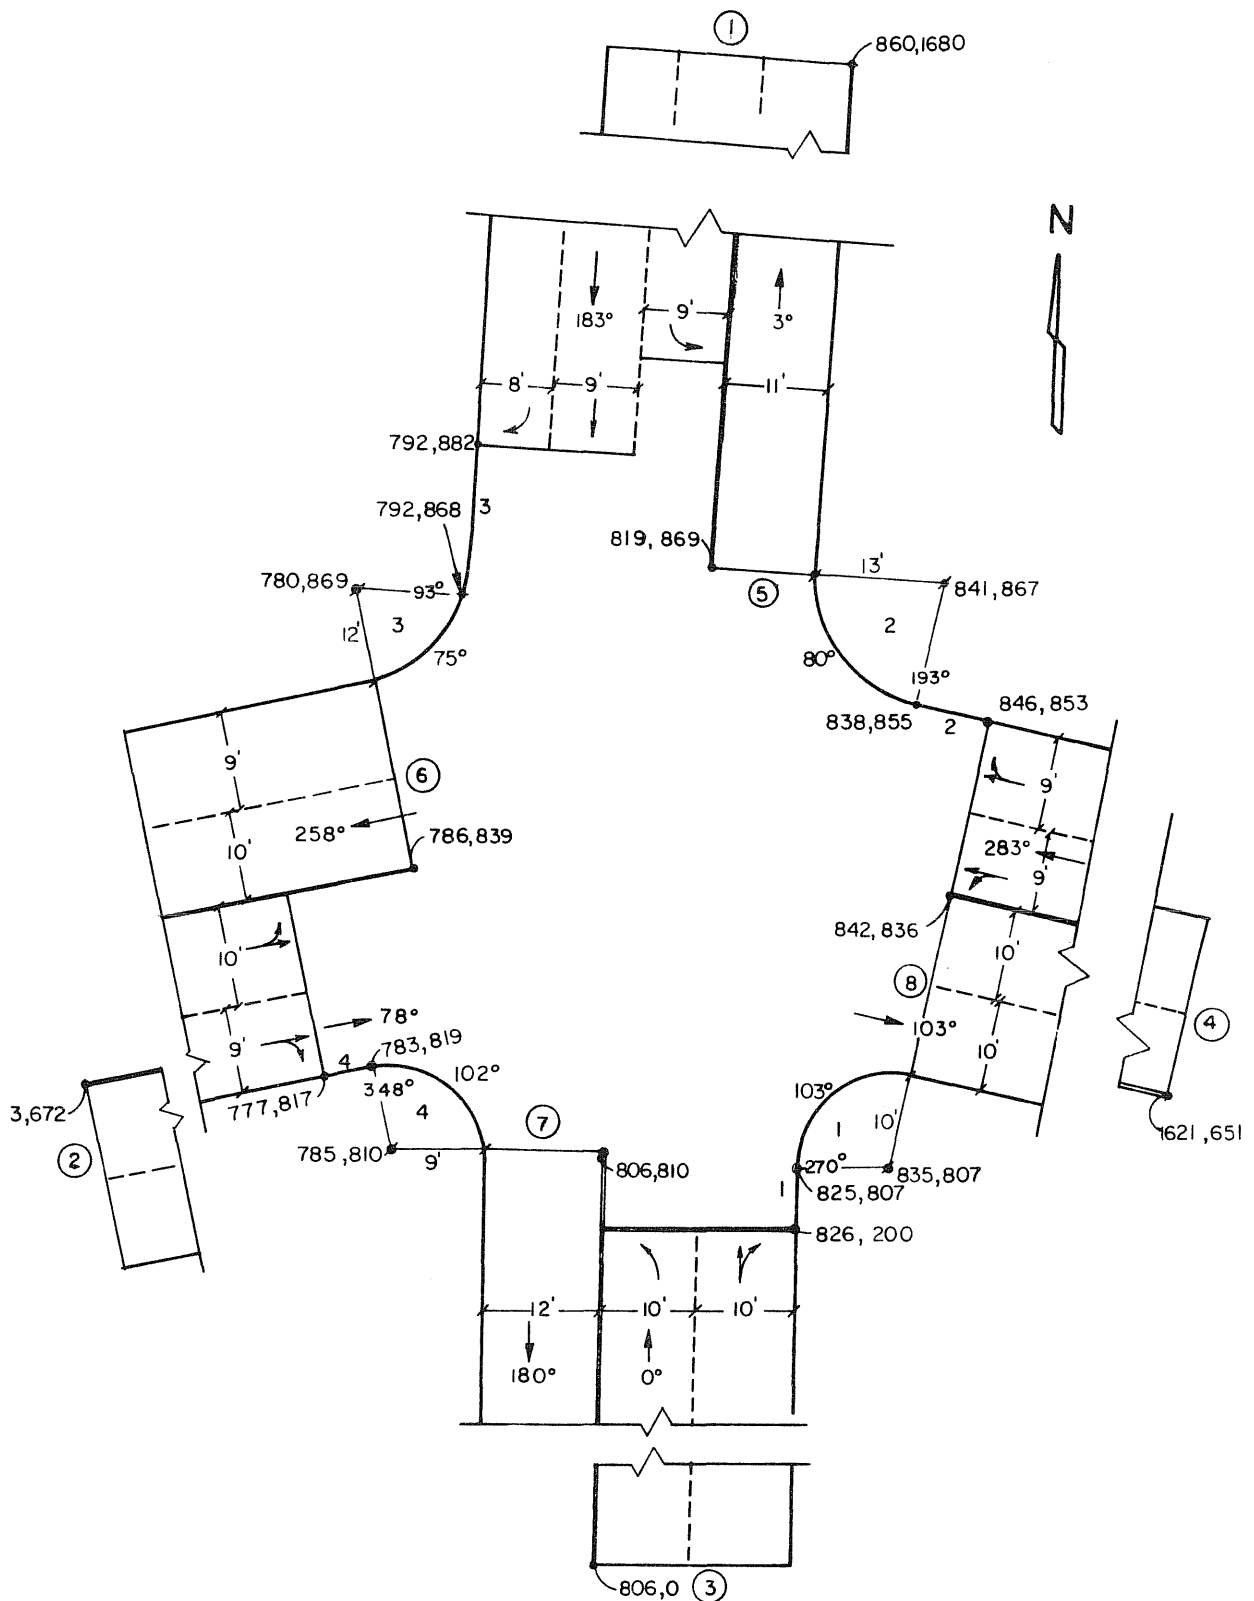


Plan view of the intersection.




Jefferson Street Southbound (1)



35th Street Eastbound (2)

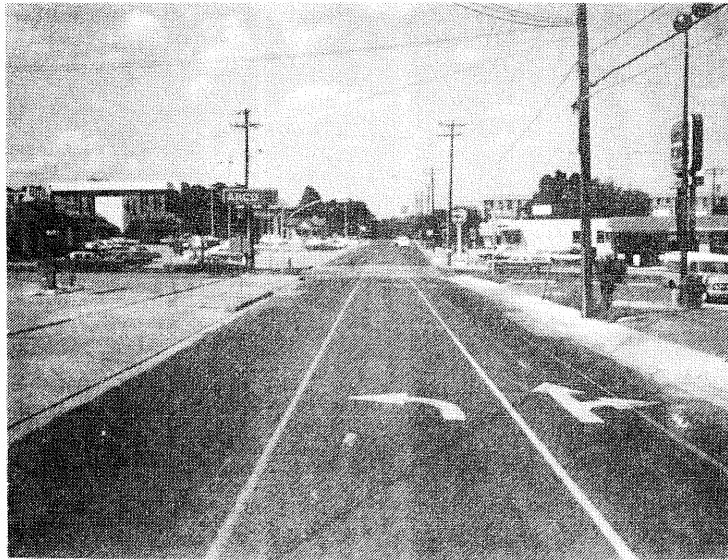

Jefferson Street Northbound (3)

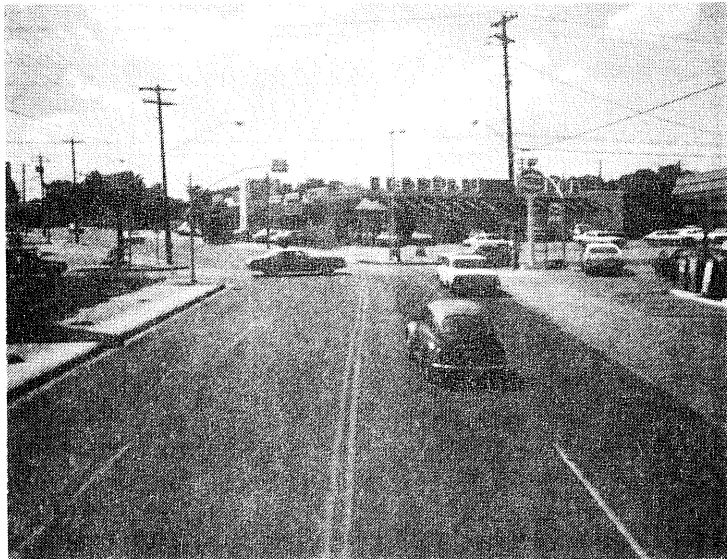

35th Street Westbound (4)

IDENTIFICATION CASE STUDY INPUT 1 (SHORT FORM)

CODED BY _____

DATE _____

PAGE 1 OF 3

A

	1	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80
		*****			35TH AND JEFFERSON:				PRE-SIMULATION				PROCESSOR			INPUT	*****
	4																
	1	2	3	4													
	4																
	5	6	7	8													
	8	12															
B.1	1	183	860	1680	35	3	20	10	LOGNRM	500	11.06	19.0	25.7	0	11	71	18
B.3	9	0	0	690	790	L			0	9	0	800	0	800	S		55
B.3	8	0	800	0	800	R			45								
B.1	2	78	3	672	35	2	25	10	SNEGEXP	550	1.18	33.6	38.7	3	0	13	84
B.3	10	0	787	0	787	LS			41	9	0	787	0	787	SR		59
B.1	3	0	806	0	35	2	20	10	LOGNRM	750	5.43	30.0	34.3	63	16	0	21
B.3	10	0	0	600	800	L			0	10	0	800	0	800	SR		100
B.1	4	283	1621	656	35	2	25	10	LOGNRM	600	4.99	23.9	28.6	13	70	17	0
B.3	9	0	800	0	800	LS			36	9	0	800	0	800	SR		64
B.1	5	3	817	869	35	1											

SECTION

IDENTIFICATION CASE STUDY INPUT 1 (SHORT FORM)

CODED BY _____

DATE _____

PAGE 2 OF 3

	1	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80
B.3	11	0	400	0	400	LSR											
B.1	6	258	786	839	35	2											
B.3	10	0	400	0	400	LS				9	0	400	0	400	SR		
B.1	7	180	806	810	35	1											
B.3	12	0	400	0	400	LSR											
B.1	8	103	842	836	35	2											
B.3	10	0	400	0	400	LS				10	0	400	0	400	SR		
C.1	4																
C.2	1	835	807	270	103	10											
C.2	2	841	867	193	80	13											
C.2	3	780	869	93	75	12											
C.2	4	785	810	348	102	9											
D.1	4																
D.2	1	826	800	825	807												
D.2	2	846	853	838	855												
D.2	3	792	882	792	868												

SECTION

IDENTIFICATION CASE STUDY INPUT 1 (SHORT FORM) CODED BY _____ DATE _____ PAGE 3 OF 3

D.2

4 777 817 783 819

E.1

4

E.2

1864 638

E.2

2 727 751

E.2

3 703 874

E.2

4 890 896

F

PRIMARY	PLOT1	SAME	250.00	18.00
---------	-------	------	--------	-------

NO NO NO NO NO NO NO NO NO NO NO NO NO NO NO NO NO NO


J

123.45	3	3	15	7	1	2	1
--------	---	---	----	---	---	---	---

J

130.50	3	1	75	6	1	2	1
--------	---	---	----	---	---	---	---

35TH AND JEFFERSON: PRE-SIMULATION PROCESSOR INPUT

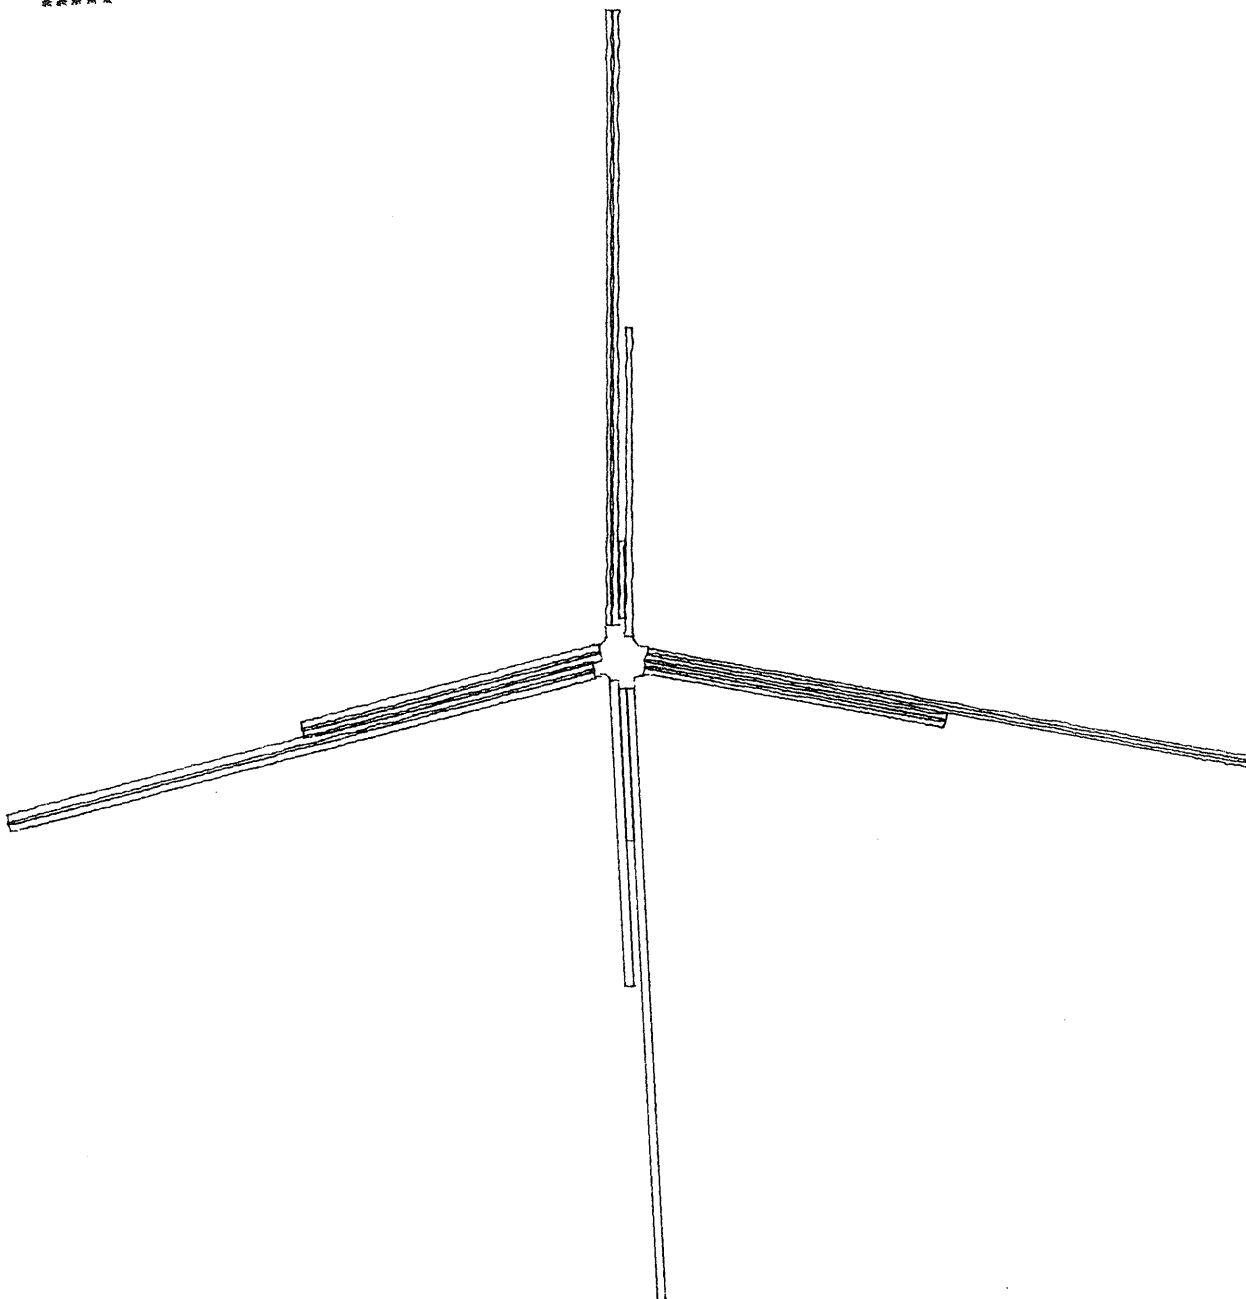


SCALE FACTOR IS 250.0 FEET PER INCH

35TH AND JEFFERSON

35TH AND JEFFERSON: PRE-SIMULATION PROCESSOR INPUT

35TH AND JEFFERSON

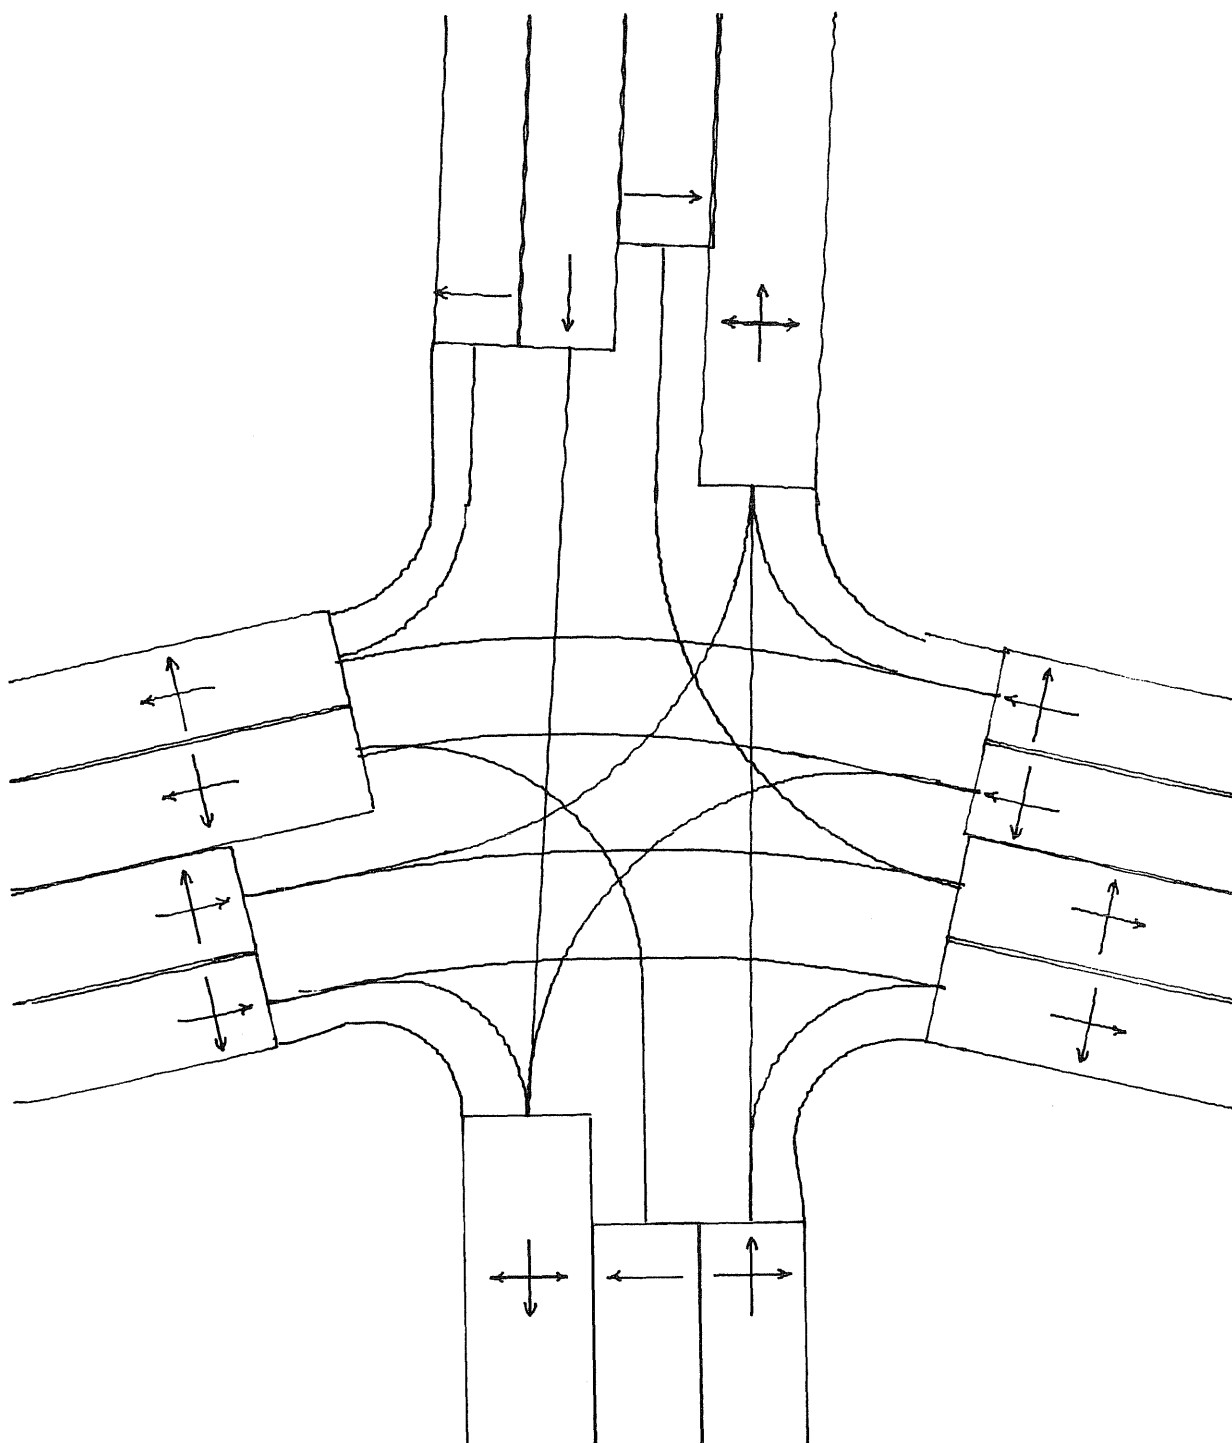

SCALE FACTOR IS 18.0 FEET PER INCH

PAGE 1 OF 1

	1	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80
A	*****					SIMPRO TITLE -	JEFFERSON STREET AT	35TH STREET									*****
A	2.00	10.00	1.00	10	30	2.800	0.800	4000	5	YES	YES	NO	NO	1.50	2.50		
A	557575757	111111															
B.1	4																
B.2	1	44AG	AG	AG	AR	AR	AG	AG	AR	AR							
B.2	1	3AA	AA	AA			AA	AA									
B.2	2	30AR	AR	AR	AG	AG	AR	AR	AG	AG							
B.2	2	3			AA	AA			AA	AA							

SIMULATION PROCESSOR FOR THE TEXAS TRAFFIC SIMULATION PACKAGE

ECHO-PRINT OF TITLE FROM GEOMETRY PROCESSOR
 ***** 35TH AND JEFFERSON: PRE-SIMULATION PROCESSOR INPUT *****

ECHO-PRINT OF TITLE FROM DRIVER-VEHICLE PROCESSOR
 ***** 35TH AND JEFFERSON: PRE-SIMULATION PROCESSOR INPUT *****

ECHO-PRINT OF TITLE FROM SIMULATION PROCESSOR INPUT
 ***** SIMPRO TITLE = JEFFERSON STREET AT 35TH STREET *****

START-UP TIME (MINUTES) ----- = 2.00
 SIMULATION TIME (MINUTES) ----- = 10.00
 STEP INCREMENT FOR SIMULATION TIME (SECONDS) ----- = 1.00
 SPEED FOR DELAY BELOW XX MPH (MPH) ----- = 10.00
 MAXIMUM CLEAR DISTANCE FOR BEING IN A QUEUE (FT) -- = 30.00
 CAR FOLLOWING EQUATION LAMBDA ----- = 2.80000
 CAR FOLLOWING EQUATION MU ----- = .80000
 CAR FOLLOWING EQUATION ALPHA ----- = 4000.00000
 SUMMARY STATISTICS PRINTED BY TURNING MOVEMENTS --- = YES
 SUMMARY STATISTICS PRINTED BY INBOUND APPROACH ---- = YES
 PUNCHED OUTPUT OF STATISTICS ----- = NO
 WRITE TAPE FOR POLLUTION DISPERSION MODEL ----- = NO
 LEAD TIME GAP FOR CONFLICT CHECKING (SECONDS) ----- = 1.50
 LAG TIME GAP FOR CONFLICT CHECKING (SECONDS) ----- = 2.50
 INTERSECTION TRAFFIC CONTROL ----- = 5 (PRE-TIMED SIGNAL)

LANE CONTROL FOR THE 15 LANES = 5 5 7 5 7 5 7 5 7 1 1 1 1 1 1

WHERE 1 = OUTBOUND (OR BLOCKED INBOUND) LANE
 2 = UNCONTROLLED
 3 = YIELD SIGN
 4 = STOP SIGN
 5 = SIGNAL
 6 = SIGNAL WITH LEFT TURN ON RED
 7 = SIGNAL WITH RIGHT TURN ON RED

A TOTAL OF 4 CAM STACK ENTRIES

ENTRY 1	PHASE 1	TIME =	44	AG	AG	AG	AR	AR	AG	AG	AR	AR
ENTRY 2	PHASE 1	TIME =	3	AA	AA	AA			AA	AA		
ENTRY 3	PHASE 2	TIME =	30	AR	AR	AR	AG	AG	AR	AR	AG	AG
ENTRY 4	PHASE 2	TIME =	3				AA	AA			AA	AA

SIMULATION PROCESSOR FOR THE TEXAS TRAFFIC SIMULATION PACKAGE

SIMPRO TITLE = JEFFERSON STREET AT 35TH STREET

SUMMARY STATISTICS FOR INBOUND APPROACH 4 FOR TURN CODE = U AND LEFT

TOTAL DELAY*(VEHICLE-SECONDS) -----	=	2110.8
NUMBER OF VEHICLES INCURRING TOTAL DELAY -----	=	17
PERCENT OF VEHICLES INCURRING TOTAL DELAY -----	=	100.0
AVERAGE TOTAL DELAY (SECONDS) -----	=	124.2
AVERAGE TOTAL DELAY/AVERAGE TRAVEL TIME -----	=	76.0 PERCENT
QUEUE DELAY*(VEHICLE-SECONDS) -----	=	1986.0
NUMBER OF VEHICLES INCURRING QUEUE DELAY -----	=	17
PERCENT OF VEHICLES INCURRING QUEUE DELAY -----	=	100.0
AVERAGE QUEUE DELAY (SECONDS) -----	=	116.8
AVERAGE QUEUE DELAY/AVERAGE TRAVEL TIME -----	=	71.5 PERCENT
STOPPED DELAY*(VEHICLE-SECONDS) -----	=	1755.0
NUMBER OF VEHICLES INCURRING STOPPED DELAY -----	=	17
PERCENT OF VEHICLES INCURRING STOPPED DELAY -----	=	100.0
AVERAGE STOPPED DELAY (SECONDS) -----	=	103.2
AVERAGE STOPPED DELAY/AVERAGE TRAVEL TIME -----	=	63.2 PERCENT
DELAY BELOW 10.0 MPH*(VEHICLE-SECONDS) -----	=	2143.0
NUMBER OF VEHICLES INCURRING DELAY BELOW 10.0 MPH --	=	17
PERCENT OF VEHICLES INCURRING DELAY BELOW 10.0 MPH --	=	100.0
AVERAGE DELAY BELOW 10.0 MPH (SECONDS) -----	=	126.1
AVERAGE DELAY BELOW 10.0 MPH/AVERAGE TRAVEL TIME --	=	77.1 PERCENT
VEHICLE-MILES OF TRAVEL -----	=	4.171
AVERAGE VEHICLE-MILES OF TRAVEL -----	=	.245
TRAVEL TIME (VEHICLE-SECONDS) -----	=	2778.7
AVERAGE TRAVEL TIME (SECONDS) -----	=	163.5
NUMBER OF VEHICLES PROCESSED -----	=	17
VOLUME PROCESSED (VEHICLES/HOUR) -----	=	102.0
TIME MEAN SPEED (MPH) = MEAN OF ALL VEHICLE SPEEDS =	=	6.4
SPACE MEAN SPEED (MPH) = TOT DIST / TOT TRAVEL TIME =	=	5.4
AVERAGE DESIRED SPEED (MPH) -----	=	22.8
AVERAGE MAXIMUM ACCELERATION (FT/SEC/SEC) -----	=	3.8
AVERAGE MAXIMUM DECELERATION (FT/SEC/SEC) -----	=	4.3
OVERALL AVERAGE TOTAL DELAY (SECONDS) -----	=	124.2
OVERALL AVERAGE QUEUE DELAY (SECONDS) -----	=	116.8
OVERALL AVERAGE STOPPED DELAY (SECONDS) -----	=	103.2
OVERALL AVERAGE DELAY BELOW 10.0 MPH (SECONDS) -----	=	126.1
PERCENT OF APPROACH VEHICLES MAKING MOVEMENT -----	=	16.3

*See Chapter 6 for an explanation of statistics..

SIMULATION PROCESSOR FOR THE TEXAS TRAFFIC SIMULATION PACKAGE

SIMPRO TITLE - JEFFERSON STREET AT 35TH STREET

SUMMARY STATISTICS FOR INBOUND APPROACH 4

TOTAL DELAY (VEHICLE-SECONDS) -----	=	5847.2	
NUMBER OF VEHICLES INCURRING TOTAL DELAY -----	=	104	
PERCENT OF VEHICLES INCURRING TOTAL DELAY -----	=	100.0	
AVERAGE TOTAL DELAY (SECONDS) -----	=	56.2	
AVERAGE TOTAL DELAY/AVERAGE TRAVEL TIME -----	=	59.5 PERCENT	
QUEUE DELAY (VEHICLE-SECONDS) -----	=	4823.0	
NUMBER OF VEHICLES INCURRING QUEUE DELAY -----	=	90	
PERCENT OF VEHICLES INCURRING QUEUE DELAY -----	=	86.5	
AVERAGE QUEUE DELAY (SECONDS) -----	=	53.6	
AVERAGE QUEUE DELAY/AVERAGE TRAVEL TIME -----	=	56.7 PERCENT	
STOPPED DELAY (VEHICLE-SECONDS) -----	=	3800.0	
NUMBER OF VEHICLES INCURRING STOPPED DELAY -----	=	90	
PERCENT OF VEHICLES INCURRING STOPPED DELAY -----	=	86.5	
AVERAGE STOPPED DELAY (SECONDS) -----	=	42.2	
AVERAGE STOPPED DELAY/AVERAGE TRAVEL TIME -----	=	44.7 PERCENT	
DELAY BELOW 10.0 MPH (VEHICLE-SECONDS) -----	=	5600.0	
NUMBER OF VEHICLES INCURRING DELAY BELOW 10.0 MPH -	=	103	
PERCENT OF VEHICLES INCURRING DELAY BELOW 10.0 MPH	=	99.0	
AVERAGE DELAY BELOW 10.0 MPH (SECONDS) -----	=	54.4	
AVERAGE DELAY BELOW 10.0 MPH/AVERAGE TRAVEL TIME --	=	57.5 PERCENT	
VEHICLE-MILES OF TRAVEL -----	=	25.502	
AVERAGE VEHICLE-MILES OF TRAVEL -----	=	.245	
TRAVEL TIME (VEHICLE-SECONDS) -----	=	9831.8	
AVERAGE TRAVEL TIME (SECONDS) -----	=	94.5	
NUMBER OF VEHICLES PROCESSED -----	=	104	
VOLUME PROCESSED (VEHICLES/HOUR) -----	=	624.0	
TIME MEAN SPEED (MPH) = MEAN OF ALL VEHICLE SPEEDS	=	10.9	
SPACE MEAN SPEED (MPH) = TOT DIST / TOT TRAVEL TIME	=	9.3	
AVERAGE DESIRED SPEED (MPH) -----	=	23.5	
AVERAGE MAXIMUM ACCELERATION (FT/SEC/SEC) -----	=	3.6	
AVERAGE MAXIMUM DECELERATION (FT/SEC/SEC) -----	=	3.3	
OVERALL AVERAGE TOTAL DELAY (SECONDS) -----	=	56.2	
OVERALL AVERAGE QUEUE DELAY (SECONDS) -----	=	46.4	
OVERALL AVERAGE STOPPED DELAY (SECONDS) -----	=	36.5	
OVERALL AVERAGE DELAY BELOW 10.0 MPH (SECONDS) -----	=	53.8	
PERCENT OF VEHICLES MAKING A U-TURN OR A LEFT TURN	=	16.3	
PERCENT OF VEHICLES GOING STRAIGHT -----	=	75.0	
PERCENT OF VEHICLES MAKING A RIGHT TURN -----	=	8.7	
AVERAGE QUEUE LENGTH FOR LANE 1 -----	=	5.6	MAX = 10
AVERAGE QUEUE LENGTH FOR LANE 2 -----	=	3.1	MAX = 10
NUMBER OF COLLISIONS -----	=	1	
AVERAGE OF LOGIN SPEED/DESIRED SPEED (PERCENT) -----	=	99.4	

SIMULATION PROCESSOR FOR THE TEXAS TRAFFIC SIMULATION PACKAGE

SIMPRO TITLE = JEFFERSON STREET AT 35TH STREET

SUMMARY STATISTICS FOR ALL APPROACHES

TOTAL DELAY (VEHICLE-SECONDS) -----	=	14005.2
NUMBER OF VEHICLES INCURRING TOTAL DELAY -----	=	378
PERCENT OF VEHICLES INCURRING TOTAL DELAY -----	=	97.9
AVERAGE TOTAL DELAY (SECONDS) -----	=	37.1
AVERAGE TOTAL DELAY/AVERAGE TRAVEL TIME -----	=	51.6 PERCENT

QUEUE DELAY (VEHICLE-SECONDS) -----	=	9452.0
NUMBER OF VEHICLES INCURRING QUEUE DELAY -----	=	258
PERCENT OF VEHICLES INCURRING QUEUE DELAY -----	=	66.8
AVERAGE QUEUE DELAY (SECONDS) -----	=	36.6
AVERAGE QUEUE DELAY/AVERAGE TRAVEL TIME -----	=	51.0 PERCENT

STOPPED DELAY (VEHICLE-SECONDS) -----	=	7483.0
NUMBER OF VEHICLES INCURRING STOPPED DELAY -----	=	258
PERCENT OF VEHICLES INCURRING STOPPED DELAY -----	=	66.8
AVERAGE STOPPED DELAY (SECONDS) -----	=	29.0
AVERAGE STOPPED DELAY/AVERAGE TRAVEL TIME -----	=	40.4 PERCENT

DELAY BELOW 10.0 MPH (VEHICLE-SECONDS) -----	=	13025.0
NUMBER OF VEHICLES INCURRING DELAY BELOW 10.0 MPH -----	=	336
PERCENT OF VEHICLES INCURRING DELAY BELOW 10.0 MPH -----	=	87.0
AVERAGE DELAY BELOW 10.0 MPH (SECONDS) -----	=	38.8
AVERAGE DELAY BELOW 10.0 MPH/AVERAGE TRAVEL TIME -----	=	54.0 PERCENT

VEHICLE-MILES OF TRAVEL -----	=	94.828
AVERAGE VEHICLE-MILES OF TRAVEL -----	=	.246
TRAVEL TIME (VEHICLE-SECONDS) -----	=	27729.9
AVERAGE TRAVEL TIME (SECONDS) -----	=	71.8
NUMBER OF VEHICLES PROCESSED -----	=	386
VOLUME PROCESSED (VEHICLES/HOUR) -----	=	2316.0
TIME MEAN SPEED (MPH) = MEAN OF ALL VEHICLE SPEEDS -----	=	14.9
SPACE MEAN SPEED (MPH) = TOT DIST / TOT TRAVEL TIME -----	=	12.3
AVERAGE DESIRED SPEED (MPH) -----	=	26.7
AVERAGE MAXIMUM ACCELERATION (FT/SEC/SEC) -----	=	3.6
AVERAGE MAXIMUM DECELERATION (FT/SEC/SEC) -----	=	3.4

OVERALL AVERAGE TOTAL DELAY (SECONDS) -----	=	36.3
OVERALL AVERAGE QUEUE DELAY (SECONDS) -----	=	24.5
OVERALL AVERAGE STOPPED DELAY (SECONDS) -----	=	19.4
OVERALL AVERAGE DELAY BELOW 10.0 MPH (SECONDS) -----	=	33.7

NUMBER OF COLLISIONS -----	=	4
AVERAGE OF LOGIN SPEED/DESIRED SPEED (PERCENT) -----	=	99.5

SIMULATION PROCESSOR FOR THE TEXAS TRAFFIC SIMULATION PACKAGE

***** SIMPRO TITLE = JEFFERSON STREET AT 35TH STREET *****

START-UP TIME = 120.000 SECONDS NUMBER OF VEHICLES PROCESSED = 35

SIMULATION TIME = 600.000 SECONDS NUMBER OF VEHICLES PROCESSED = 386

NUMBER OF VEHICLES IN THE SYSTEM AT SUMMARY = 35

AVERAGE NUMBER OF VEHICLES IN THE SYSTEM = 46.8

INITIAL TM TIME = .535 SECONDS COST = \$.03

START-UP TM TIME = 14.175 SECONDS COST = \$.91
 REAL/TM = 8.466

SIMULATION TM TIME = 115.867 SECONDS COST = \$ 7.40
 REAL/TM = 5.178

SUMMARY TM TIME = 1.299 SECONDS COST = \$.08

TOTAL TM TIME = 131.876 SECONDS COST = \$ 8.43

VEHICLE-SECONDS OF SIMULATION PER TM TIME = 239.325


VEHICLE UPDATES PER TM TIME = 239.325

CHAPTER 6. EXPLANATION OF SIMULATION RUN STATISTICS

The model reports statistics as instructed by the user at the completion of a run. Several pages of output are generated and this chapter is presented to define some of these statistics.

Total Delay

This is the difference between a vehicle's actual travel time through the system and the time it would have taken at the vehicle's desired speed. This type of delay cannot be measured effectively in the field and is therefore included in the output for comparison between subsequent runs.

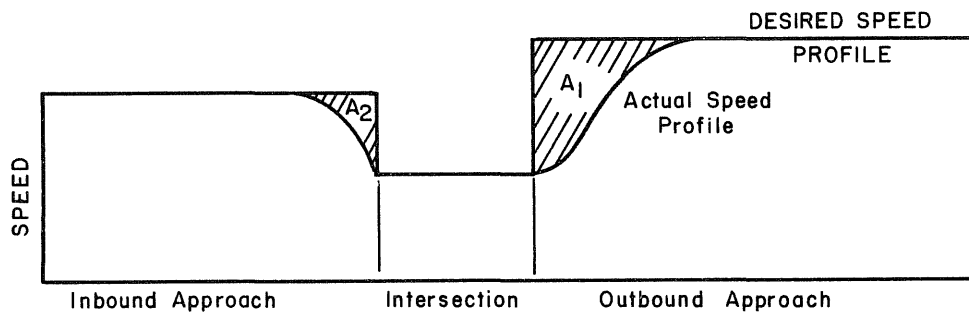

$$\text{Total Delay} = \text{Area 1} + \text{Area 2} \quad (A_1 + A_2)$$

In the model, a queue of vehicles at the intersection is recognized. In order to join a queue (or begin one), three factors must be satisfied.

- (1) The vehicle velocity must be less than 3 feet per second;
- (2) The vehicle must be less than XQDIST feet away from the vehicle ahead (or the stop line if first in lane); and
- (3) The vehicle ahead must be in a queue.

XQDIST is a variable on card 2 of the simulation input and is recommended at 30 feet (1-1/2 to 2 car lengths).

Queue Delay

This delay counter is merely a count of how long a vehicle is in a queue. Once a vehicle enters a queue, it continues to accrue queue delay until it enters the intersection.

Stopped Delay

This delay is accrued only while a vehicle is in a queue. Additionally, it is incremented only when the speed of the vehicle falls below 3 feet per second.

Delay Below XX mph

For each time step in simulation that a vehicle in the system is travelling at a speed less than or equal to XX mph, a counter for this delay for that vehicle is incremented. This delay may be accrued anywhere on the inbound or outbound approach and in the intersection.

Two delay statistics appear to have about the same wording for each of the four delays, that is, AVERAGE ____ DELAY and OVERALL ____ DELAY. For example, on page 72, AVERAGE STOPPED DELAY is reported as 42.2 seconds, and OVERALL AVERAGE STOPPED DELAY is 36.5 seconds. In this case, 90 vehicles stopped for an average of 42.2 seconds each. But $3800.0 \text{ seconds} \div 104 \text{ vehicles}$ (total number of vehicles processed on approach 4) equals 36.5 seconds. Therefore:

$$\text{AVERAGE STOPPED DELAY} = \frac{\text{AVERAGE STOPPED DELAY PER STOPPED VEHICLE}}{\text{STOPPED VEHICLE}}$$

$$\text{OVERALL AVERAGE STOPPED DELAY} = \frac{\text{AVERAGE STOPPED DELAY PER VEHICLE (COUNTING ALL VEHICLES)}}{\text{PER VEHICLE (COUNTING ALL VEHICLES)}}$$

Login Speed/Desired Speed and Number of Vehicles Eliminated

These two statistics are gathered for each inbound approach and represent the ratio of actual vehicle login (entering the simulation) speed to the vehicle's desired login speed generated by DVPRO. If this ratio is not fairly high then the queue is most likely backing up to the beginning of the approach which could cause vehicles to be eliminated from the system. If either of these conditions occur, the approach lengths should be made longer and the simulation should be rerun.

APPENDIX

HEADWAY DISTRIBUTIONS

APPENDIX. HEADWAY DISTRIBUTIONS

HEADWAY DISTRIBUTION ANALYSIS PROCESSOR INPUT FORM

A. (MANDATORY)

1																			
																			60

B. Headway (sec)

1								8
				•				

(Repeat B for each observed headway)

HEADWAY DISTRIBUTIONS DISCUSSION

Traditionally, when traffic simulation models have utilized a theoretical distribution of vehicle headways in traffic flow, a negative exponential, or a shifted negative exponential distribution has been specified. However, the TEXAS model allows the user to call any of seven distributions. The seven distributions which are available are (1) log normal, (2) gamma, (3) Erlang, (4) shifted negative exponential, (5) negative exponential, (6) constant, and (7) uniform.


To use distributions (1) through (4) and (7) both traffic volume information and a measure of dispersion in headways must be provided. Distributions (5) and (6) require only volume.

The following graphs illustrate the relationship between three values of the parameter (if required) for each distribution using the probability of occurrence given a mean headway of six seconds (or a traffic volume of 600 vehicles per hour). Since the "constant" distribution is really not a distribution at all, every headway will be exactly equal to the value of mean time spacing between vehicles.


If the traffic engineer has observed headway data for an intersection, the computer program DISFIT can be used as an aid in fitting the observed data with one of the distributions available in the TEXAS model. A chi-square goodness-of-fit test and a Kolmogorov-Smirnov maximum cumulative difference test provide a basis for choice of the most suitable distribution.

Based on current experience in using the TEXAS model, tentative recommendations for headway distributions follow. These are to be used only if no better information is available.


Light flow (less than 200 vph per lane):	Negative exponential
Medium volumes (200 - 600 vph per lane):	Log normal and shifted negative exponential appear to give approximately the same results
High volumes (more than 600 vph per lane):	Shifted negative exponential

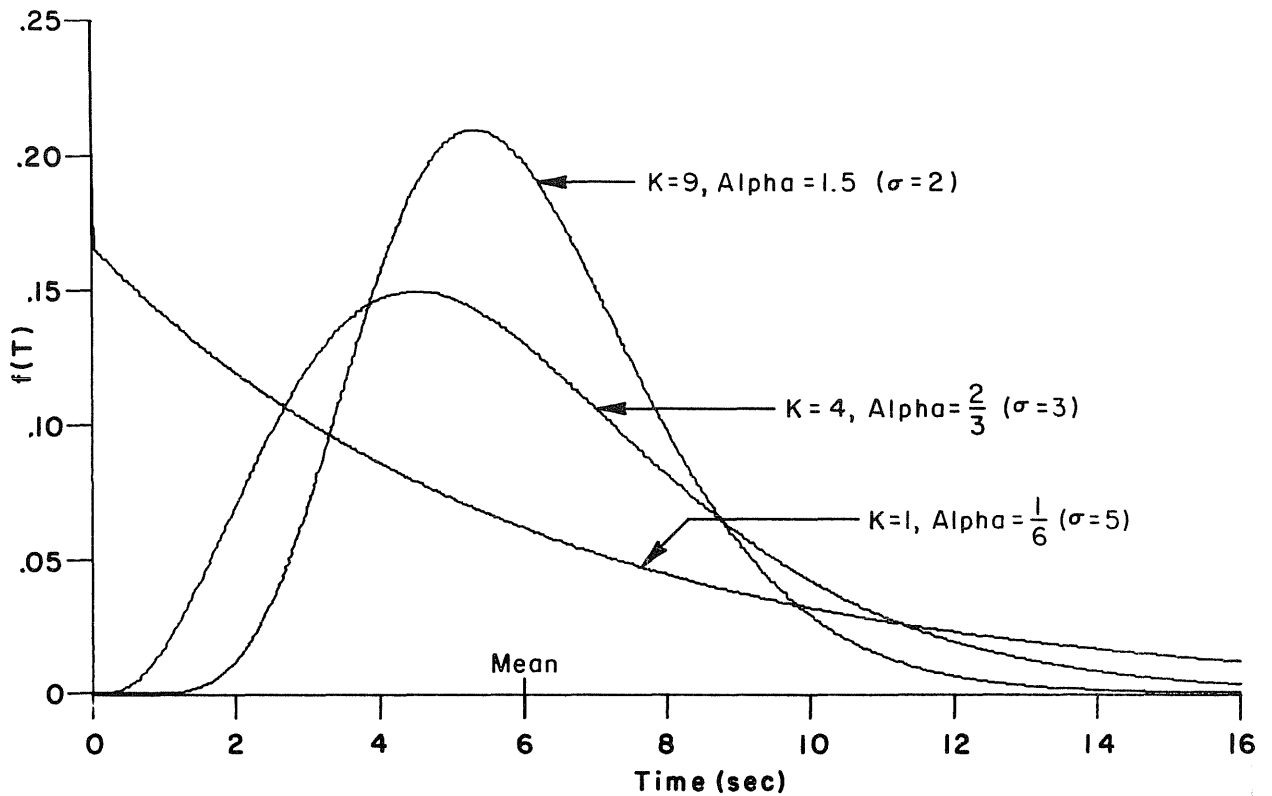


Erlang probability density function.

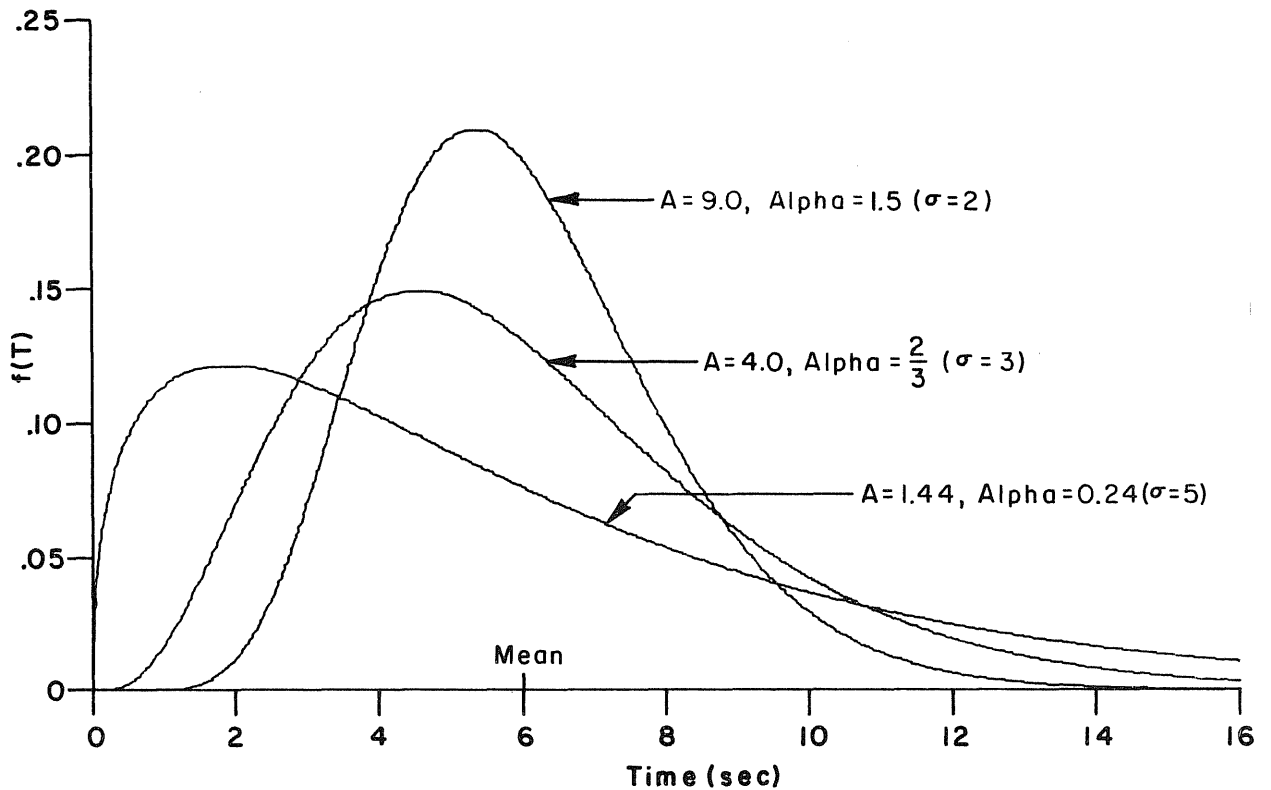


Gamma probability density function.

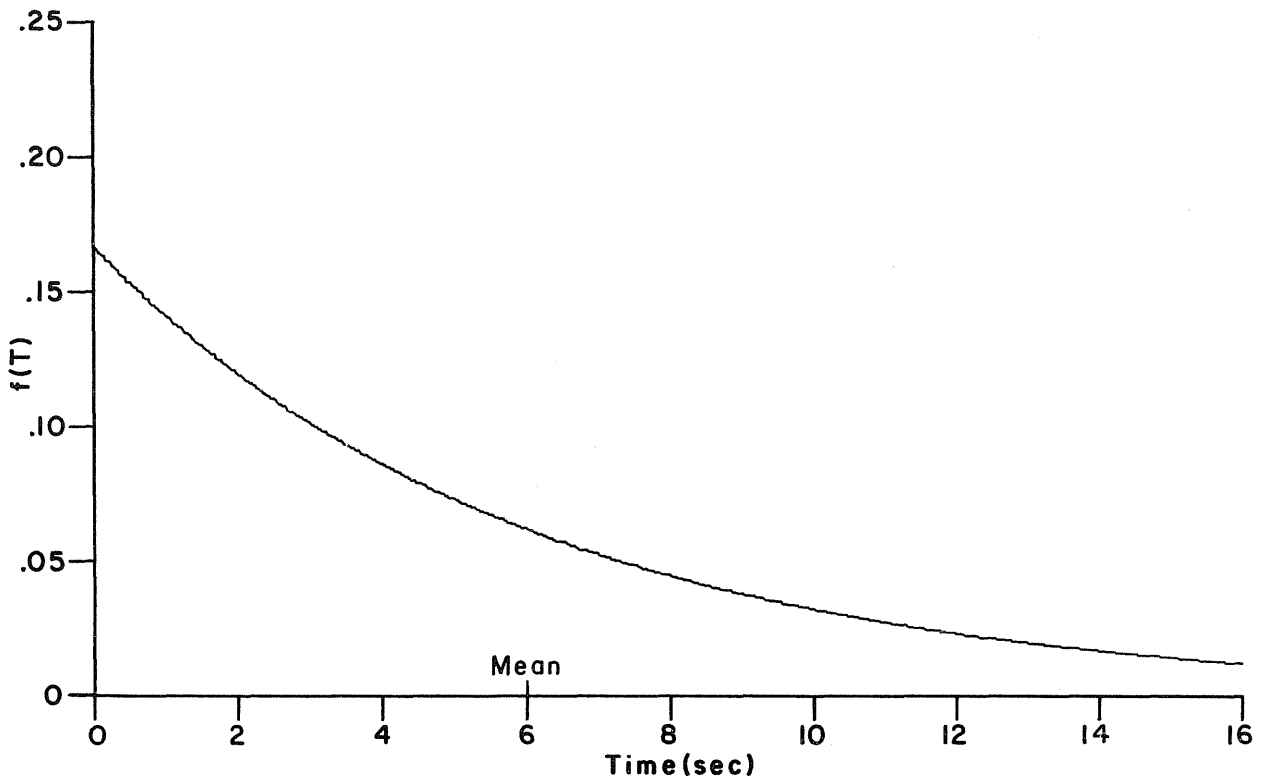


Negative exponential probability density function.

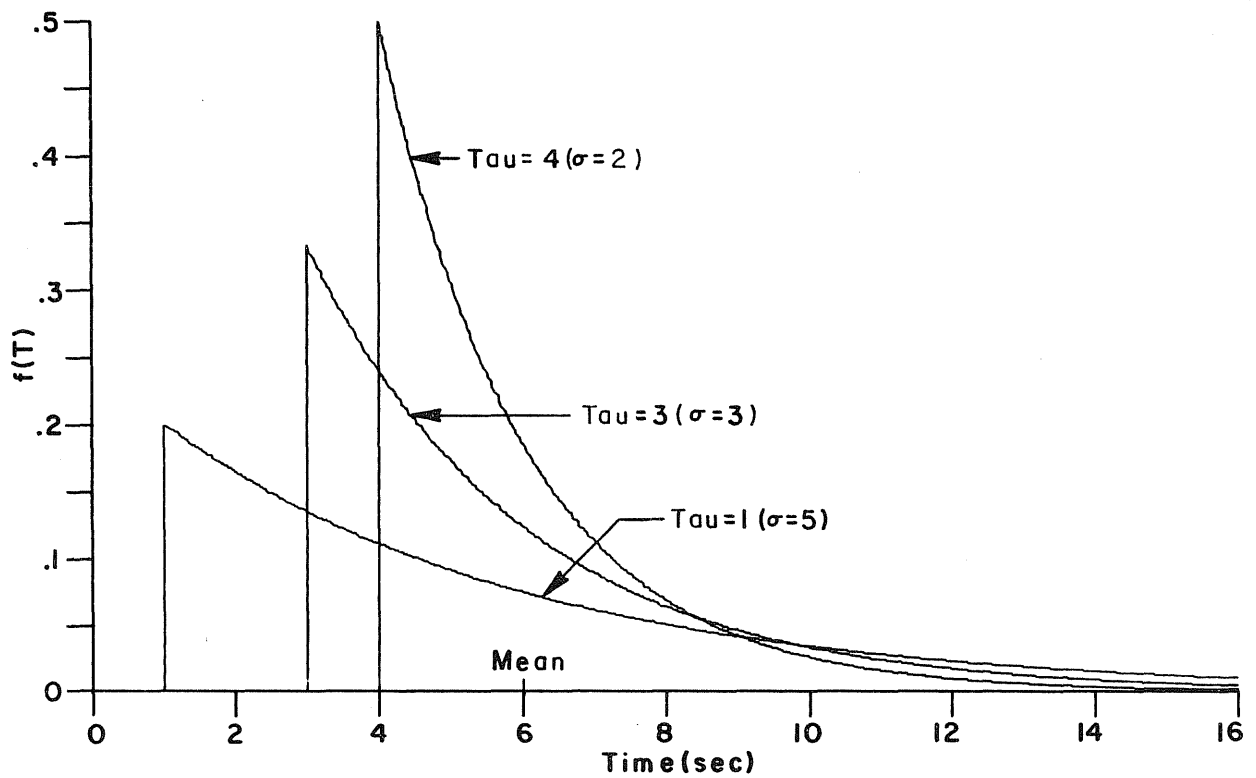

Shifted negative exponential probability density function.

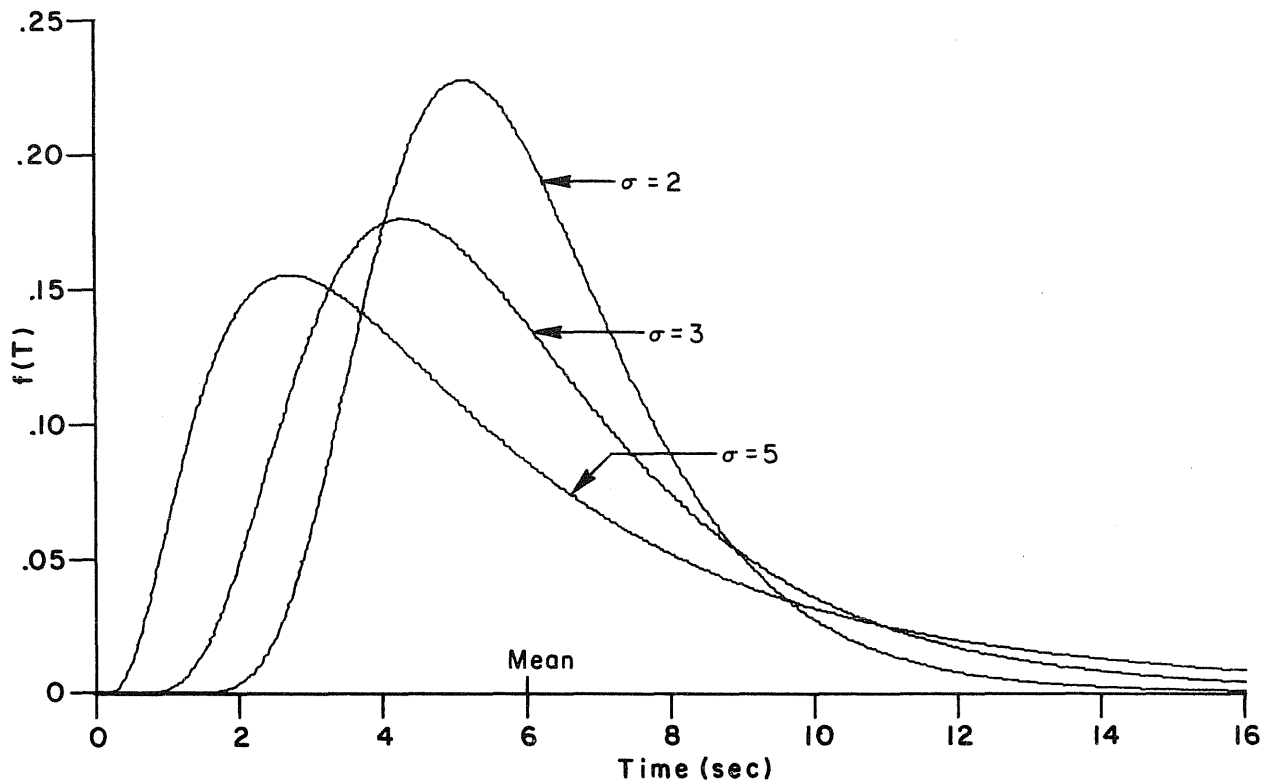

Lognormal probability density function.

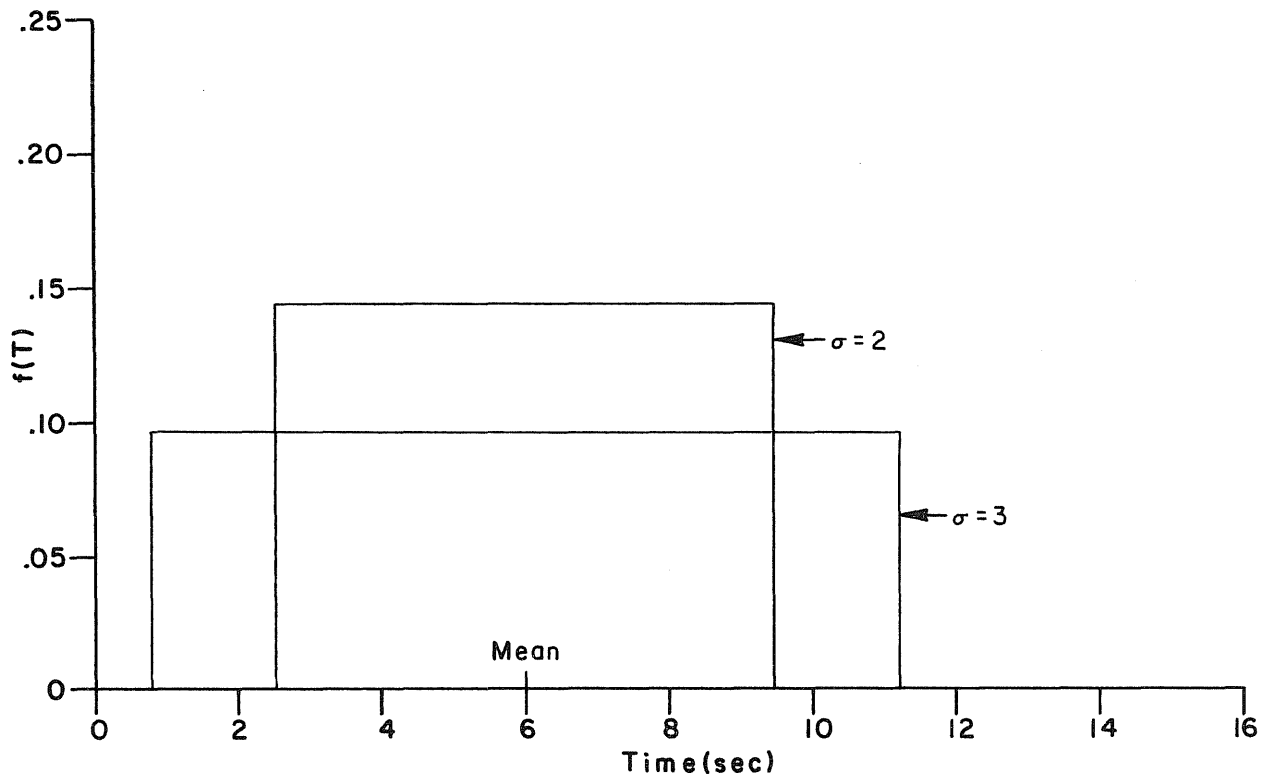

Uniform probability density function.

(Continued from inside front cover)

- 183-8 "The Resilient and Fatigue Characteristics of Asphalt Mixtures Processed by the Dryer-Drum Mixer," by Manuel Rodriguez and Thomas W. Kennedy, December 1976.
- 183-9 "Fatigue and Repeated-Load Elastic Characteristics of Inservice Portland Cement Concrete," by John A. Crumley and Thomas W. Kennedy, June 1977.
- 183-10 "Development of a Mixture Design Procedure for Recycled Asphalt Mixtures," by Ignacio Perez, Thomas W. Kennedy, and Adedare S. Adedimila, November 1978.
- 183-11 "An Evaluation of the Texas Blackbase Mix Design Procedure Using the Indirect Tensile Test," by David B. Peters and Thomas W. Kennedy, March 1979.
- 183-12 "The Effects of Soil Binder and Moisture on Blackbase Mixtures," by Wei-Chou V. Ping and Thomas W. Kennedy, May 1979.
- 184-1 "The TEXAS Model for Intersection Traffic—Development," by Clyde E. Lee, Thomas W. Rioux, and Charlie R. Copeland, December 1977.
- 184-2 "The TEXAS Model for Intersection Traffic — Programmer's Guide," by Clyde E. Lee, Thomas W. Rioux, Vivek S. Savur, and Charlie R. Copeland, December 1977.
- 184-3 "The TEXAS Model for Intersection Traffic—User's Guide," by Clyde E. Lee, Glenn E. Grayson, Charlie R. Copeland, Jeff W. Miller, Thomas W. Rioux, and Vivek S. Savur, July 1977.
- 184-4F "Application of the TEXAS Model for Analysis of Intersection Capacity and Evaluation of Traffic Control Warrants," by Clyde E. Lee, Vivek S. Savur, and Glenn E. Grayson, July 1978.
- 188-1 "Behavior of Stage-Cast Inverted T-Beams with the Precast Flange in Tension," by S. A. A. Wahidi and R. W. Furlong, August 1976.
- 188-2F "Strength and Behavior of Stage-Cast Inverted T-Beams," by Richard W. Furlong, August 1978.
- 196-1F "Design of Reinforcement for Notched Ends of Prestressed Concrete Girders," by Gangadharan Menon and Richard W. Furlong, August 1977.
- 198-1F "Control of Cracking on the Side Faces of Large Reinforced Concrete Beams," by G. C. Frantz and J. E. Breen, September 1978.
- 209-1F "Fatigue Loading of Cantilever Sign Structures from Truck Wind Gusts," by Bruce M. Creamer, Karl H. Frank, and Richard E. Klingner, April 1979.
- 212-1F "Design Criteria for Median Turn Lanes," by C. Michael Walton, Thomas W. Horne, and William K. Fung, March 1978.
- 244-1 "Analysis of Single Piles Under Lateral Loading," by Barry J. Meyer and Lymon C. Reese, December 1979.
- 245-1F "Texas Traffic Data Acquisition Program," by Han-Jei Lin, Clyde E. Lee, and Randy Machemehl, February 1980.
- 514-1F "Effects of Temperature Change on Plastic Crash Cushions," by Victor N. Toth and Clyde E. Lee, January 1976.
- 1053-1F "Social Service Agency Transportation Services: Current Operations and the Potential for the Increased Involvement of the Taxi Industry," by Walter L. Cox and Sandra Rosenbloom, August 1977.
- RR 16 "The Prediction of Passenger Riding Comfort from Acceleration Data," by Craig C. Smith, David Y. McGehee, and Anthony J. Healey, March 1976.
- RR 35 "Perceived Environmental Utility Under Alternative Transportation Systems: A Framework for Analysis," by Pat Burnett, March 1976.
- RR 36 "Monitoring the Effects of the Dallas/Fort Worth Regional Airport — Volume I: Ground Transportation Impacts," by William J. Dunlay, Jr., Lyndon Henry, Thomas G. Caffery, Douglas W. Wiersig, and Waldo A. Zambrano, December 1976.
- RR 37 "Monitoring the Effects of the Dallas/Fort Worth Regional Airport — Volume II: Land Use and Travel Behavior," by Pat Burnett, David Chang, Carl Gregory, Arthur Friedman, Jose Montemayor, and Donna Prestwood, July 1976.
- RR 38 "The Influence on Rural Communities of Interurban Transportation Systems, Volume II: Transportation and Community Development: A Manual for Small Communities," by C. Michael Walton, John Huddleston, Richard Dodge, Charles Heimsath, Ron Linehan, and John Betak, August 1977.
- RR 39 "An Evaluation of Promotional Tactics and Utility Measurement Methods for Public Transportation Systems," by Mark Alpert, Linda Golden, John Betak, James Story, and C. Shane Davies, March 1977.
- RR 40 "A Survey of Longitudinal Acceleration Comfort Studies in Ground Transportation Vehicles," by L. L. Hoberock, July 1976.
- RR 43 "A Pavement Design and Management System for Forest Service Roads — A Working Model," by Freddy L. Roberts, B. Frank McCullough, Hugh J. Williamson, and William R. Wallin, February 1977.
- RR 45 "Characteristics of Local Passenger Transportation Providers in Texas," by Ronald Briggs, January 1977.
- RR 46 "The Influence on Rural Communities of Interurban Transportation Systems, Volume I: The Influence on Rural Communities of Interurban Transportation Systems," by C. Michael Walton, Richard Dodge, John Huddleston, John Betak, Ron Linehan, and Charles Heimsath, August 1977.
- RR 47 "Effects of Visual Distraction on Reaction Time in a Simulated Traffic Environment," by C. Josh Holahan, March 1977.
- RR 48 "Personality Factors in Accident Causation," by Deborah Valentine, Martha Williams, and Robert K. Young, March 1977.
- RR 49 "Alcohol and Accidents," by Robert K. Young, Deborah Valentine, and Martha S. Williams, March 1977.
- RR 50 "Alcohol Countermeasures," by Gary D. Hales, Martha S. Williams, and Robert K. Young, July 1977.
- RR 51 "Drugs and Their Effect on Driving Performance," by Deborah Valentine, Martha S. Williams, and Robert K. Young, May 1977.
- RR 52 "Seat Belts: Safety Ignored," by Gary D. Hales, Robert K. Young, and Martha S. Williams, June 1978.
- RR 53 "Age-Related Factors in Driving Safety," by Deborah Valentine, Martha Williams, and Robert K. Young, February 1978.
- RR 54 "Relationships Between Roadside Signs and Traffic Accidents: A Field Investigation," by Charles J. Holahan, November 1977.
- RR 55 "Demographic Variables and Accidents," by Deborah Valentine, Martha Williams, and Robert K. Young, January 1978.
- RR 56 "Feasibility of Multidisciplinary Accident Investigation in Texas," by Hal L. Fitzpatrick, Craig C. Smith, and Walter S. Reed, September 1977.
- RR 60 "A Pavement Design and Management System for Forest Service Roads — Implementation," by B. Frank McCullough and David R. Luhr, January 1979.
- RR 61 "Multidisciplinary Accident Investigation," by Deborah Valentine, Gary D. Hales, Martha S. Williams, and Robert K. Young, October 1978.
- RR 62 "Psychological Analysis of Degree of Safety in Traffic Environment Design," by Charles J. Holahan, February 1979.
- RR 63 "Automobile Collision Reconstruction: A Literature Survey," by Barry D. Olson and Craig C. Smith, December 1979.
- RR 64 "An Evaluation of the Utilization of Psychological Knowledge Concerning Potential Roadside Distractors," by Charles J. Holahan, December 1979.

